



ASTRANET 1500 PE



ASTRANET 2000 PE



ASTRANET 1500 PE floating hitch

- Adaptation on excavators 4 up to 12 Tons.
- 2 models for sweeping widths of 1.50 m or 2 m. Ideal for sweeping on public works sites.
- Sweeper equipped with coupling "FloatSweep" to follow road form.
- Robust frame for intensive work.
- Hydraulic motor for high flow up to 120 L/min.
- Inserted hydraulic motors in the metal brush hub for compact transport size and for engine protection.
- Mixed brush Ø 600 mm (polyester + polypropylene).
- 2 parking stands.
- Watering in option with 2 tanks of 150 L each.



Technical characteristics


MODELS	ASTRANET 1500 PE	ASTRANET 2000 PE
Coupling	Excavator 4 up to 12 Tons	
Brush length	1500 mm	2000 mm
Diameter (inner / outer)	178 / 600 mm	
Hub	Metal	
Brush fibre	Mixed (Polypropylene/polyester)	
Dimensions (L x W x H)	1,03 x 1,64 x 1,08 m	1,03 x 2,13 x 1,08 m
Weight (without linkage)	310 kg with tanks	350 kg with tanks
Flow 1 hydraulic motor	25 L/min. mini. - 120 L/min. max.	
Maximum pressure	250 bar	

Standard equipment

- Mixed brush (polypropylene/polyester).
- Hitch "Floatsweep" to follow road form
- 1 hydraulic motor
- Integrated flow divider / pressure relief valve



		£	Reference
MODELS			
ASTRANET 1500 PE for EXCAVATOR for carrier with hydraulic flow from 25 to 120 l/min • With mixed brush (polypropylene/polyester)		4,415	72051J
ASTRANET 2000 PE for EXCAVATOR for carrier with hydraulic flow from 25 to 120 l/min • With mixed brush (polypropylene/polyester)		5,250	72071J
COUPLING HITCH > OBLIGATORY TO DETERMINE			
• EXCAVATOR with quick-fit coupling			See page 210-213
• STANDARD plate 8 holes without bolts for your own adaptation		75	70366703L
OPTIONS			
Pressure watering (kit electrical pump 12V - electrical power needed) – 2 water tanks of 150 L Automatic start of watering AUTOFLOW.		1,805	72052J
SPARE BRUSH			
Brush Ø 600 mm, value for 1 m	mixed (polypropylene/polyester)	300	24F006
	In polyester	420	24F004

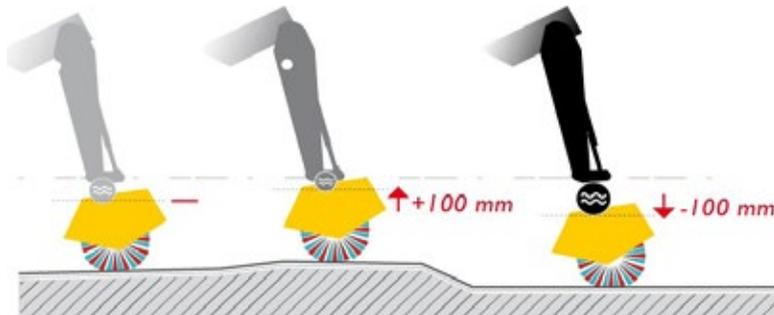

Attachment equipped by "FloatSweep" fastener for tracking road compliance.



☑ OPTIONS



Option pressure watering.
2 water tanks of 150L. 12V or 24V electrical socket.



Quick fit coupling for excavator.
Adaptation on all type of carrier and any coupling.



Specific painting