



XYLOSCIE 600 T



XYLOSCIE 700 T PRO 2



XYLOSCIE 700 T SR

- For tractors from 10 HP
- Blade in carbide steel and with righth/left angling, requiring less power and to get a clean cut :
  - Ø blade 600 mm on XYLOSCIE 600.
  - Ø blade 700 mm on XYLOSCIE 700.
- Pivoting log support with recess to prevent wood from jamming on the blade.
- Control rod for the cutting length.
- Complete blade protection with guard.
- Electromagnetic clutch = blade stops in less than 10 seconds (except XYLOSCIE 700 T PRO 2).
- 4 or 5 m long conveyor with metal bars (in option on XYLOSCIE 700T PRO).



### Technical characteristics of saws

MODELS	XYLOSCIE 600 T	XYLOSCIE 700 T SR	XYLOSCIE 700 T PRO 2
Ø max. with round log	200 mm	260 mm	
Ø max. with round half-log	300 mm	375 mm	
Ø blade	600 mm carbide teeth	700 mm carbide teeth	
Wood length control	Ajustable stop		
Dimensions (L x W x H)	1,06 x 0,88 x 1,20 m	1,18 x 0,88 x 1,25 m	1,06 x 0,98 x 1,15 m
Weight	145 kg	158 kg	195 kg
Coupling / Drive	Tractor 3-point linkage cat. N°1 PTO 500 rpm (10 HP mini. - 50 HP maxi.) 12-volt electrical socket	Tractor 3-point linkage cat. N°1 and 2 PTO 540 rpm (from 25 HP up to 75 HP) 12-volt electrical socket	Tractor 3-point linkage cat. N°1 and 2 PTO 430 rpm (from 25 HP up to 75 HP) Delivered with transmission shaft with a security bolt.
Moving	Handle + 2 transport wheels Ø 200 mm		Only with 3-point linkage



- Reinforced frame
- Front hydraulic motor for a better drive.
- Independant conveyor belts, maintained during the transport.
- Foldable conveyor for the transport.

### Technical characteristics of exit conveyors

MODELS	EXIT CONVEYOR 4 m + frame	EXIT CONVEYOR 5 m + frame
Length	4 m	5 m
Transport dimensions (L x W x H)	1,28 x 1,51 x 2,68 m (with saw)	1,28 x 1,51 x 3,12 m (with saw)
Work dimensions (L x W x H)	1,36 x 4,06 x 3,12 m (with saw)	1,36 x 4,70 x 3,67 m (with saw)
Loading height at 45°	2,96 m	3,61 m
Part width	250 mm	
Number of strips / bars	9 / 9	11 / 11
Travel speed	15 l/min. for a 10 l/min. flow	
Weight	237 kg with frame for saw assembly	289 kg with frame for saw assembly
Drive	Tractor pump (one single acting + return) or electric	

### Standard equipment

- Saw blade with carbide teeth.
- Drive through 2 trapezoid belts.
- Pivoting log holder with retaining claw.
- Control rod for the cutting length.
- Rocking stand with locking system for transport.
- Handle for transport (except XYLOSCIE 700 T PRO 2).
- 12-volt electromagnetic clutch (except XYLOSCIE 700 T PRO 2).
- Suction nozzle (except XYLOSCIE 700 T PRO 2).

XYLOSCIE 700 T PRO 2 with exit conveyor (manual installation)




		£	Reference		
<b>MODELS</b>					
<b>XYLOSCIE 600 T</b> : Drive through PTO 500 rpm (delivered with shaft with safety bolt) + requires a three-pin 12-volt socket		<b>2,000</b>	78467A		
<b>XYLOSCIE 700 T SR</b> : Drive through PTO 500 rpm (delivered with shaft with safety bolt) + requires a three-pin 12-volt socket		<b>2,765</b>	78468A		
<b>XYLOSCIE 700 T PRO 2</b> : Drive through PTO 430 rpm (delivered with shaft with safety bolt)		<b>2,230</b>	78450A		
<b>XYLOSCIE 700 T PRO 2 + exit conveyor 4 m + log stand extension</b> : Drive through PTO 430 rpm (delivered with shaft with safety bolt) Conveyor driven by tractor pump (1 SA + R)		<b>6,445</b>	78457A		
<b>XYLOSCIE 700 T PRO 2 + exit conveyor 5 m + log stand extension</b> : Drive through PTO 430 rpm (delivered with shaft with safety bolt) Conveyor driven by tractor pump (1 SA + R)		<b>7,085</b>	78458A		
<b>OPTIONS</b>		<b>600 T</b>	<b>700 T SR</b>	<b>700 T PRO 2</b>	
Log stand extension (to fix on the stand)		●	●	●	<b>155</b> 78409A
Hydraulic unit, 10 L/min. for saw with conveyor - (delivered with oil)				●	<b>1,115</b> 70185A
Discharge conveyor	4 m long, strip width 25 cm with metal bars			●	<b>3,685</b> 78411A
	5 m long, strip width 25 cm with metal bars			●	<b>4,320</b> 78415A
<b>SPARE PARTS</b>					
Saw blade Ø 600 mm in carbide steel		●			<b>170</b> 24A137
Saw blade Ø 700 mm in carbide steel			●	●	<b>205</b> 24A138


The ● means compatibility of options with different models.



XYLOSCIE 700 T PRO 2 + 4 m exit conveyor

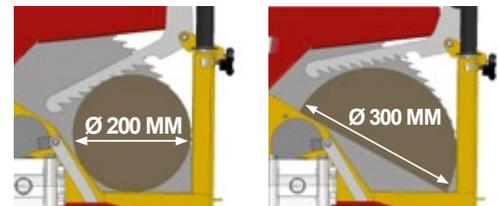

XYLOSCIE 600

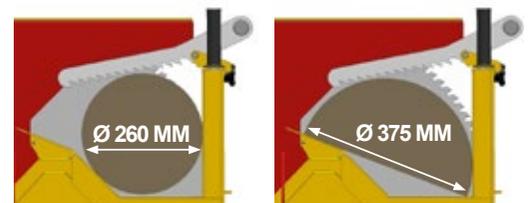

XYLOSCIE 700