



POLYCOMPACT with hydraulic unit



Post splitter POLYCOMPACT



POLYCOMPACT for transport



- Post splitting capacity up to 2.25 m long. Splitting power 15 tons (18 tons optional).
- Hydraulic beam adjustment according to pile length (4 positions : 1.15 m / 1.50 m / 1.88 m and 2.25 m).
- A unique design: a compact splitter with a telescopic beam that is easy to store (a compact 2.37 m when folded) and does not require the addition of an axle for transport.
- Quick-release 30 cm sharp wedge (2 bolts) for splitting logs.
- Beam placed on the ground to facilitate the installation of the pile and provide an ideal working height for the user.
- Driven by : Tractor pump or 540 rpm PTO or electric/ hydraulic control unit.
- 4 pile supports as standard for greater ease of use.
- Robust welded IPE chassis.


Technical characteristics

MODEL	POLYCOMPACT
<i>Hydraulic power</i>	15 Tons (18 Tons with hydraulic unit)
<i>Clearance</i>	4 positions up to 2.25 m
<i>Cylinder travel</i>	1,10 m
<i>Cylinder dimensions</i>	100/60 mm
<i>Wedge length</i>	300 mm
<i>Drive</i>	Tractor oil pump with 2 couplers Or hydraulic unit 540 rpm, 42 L/min.
<i>Coupling</i>	3-point linkage N°1 and N°2
<i>Transport dimensions (L x W x H)</i>	2.41 x 1.20 x 1.20 m (F15) 2.41 x 1.20 x 1.44 m (F18)
<i>Weight</i>	690 Kg (740 Kg -> F18)

Standard equipment

- Post support.
- Wedge mounted on an anti-wear plate.
- Telescopic frame.
- Sharp parting-splitting wedge.

4-position telescopic beam on POLYCOMPACT - A unique concept

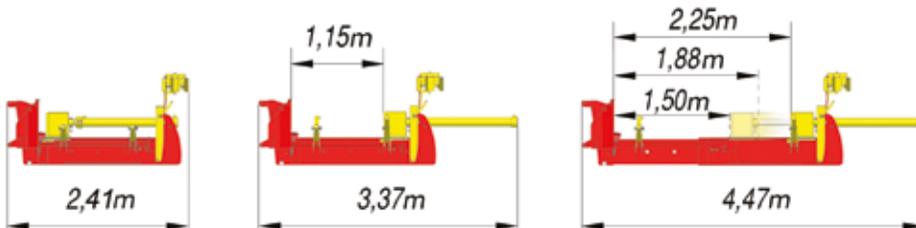

	£	Reference
MODELS		
POLYCOMPACT PH : Power 15 Tons - Driven by tractor oil pump. 2 hoses and 2 ½" male valve couplers	6,195	70060B
POLYCOMPACT CH : Power 18 Tons - Driven by hydraulic unit 540 rpm - Pump 42 L/min. - 40 L oil tank (delivered with oil and shaft)	8,255	70061B
OPTIONS		
Electromechanical time meter (50 L/min.)	400	26A407