



THE MANUFACTURER'S ADVICE

DEFINE THE POST DRIVER BEST-SUITED FOR YOUR WORKS AND NEEDS

Your carrier	Your activity	Post driving process	Machine	Use	Advantages	Pages
Tractor	Stock breeder, farm contractor, civil engineer, fencing contractor, Agricultural cooperative, etc...	Hammer with halyard	TILTING MAST	Ideal for flat and hilly grounds.	Flat striking	96
			Rotary and pendular TURBOFRAP 200	Ideal for hilly and uneven grounds (serial : automatic plumbing and aligning system, 200° rotation, 3.00 m long posts maximum).	Flat striking Productivity Post driving quality	98
		Vibration with striking head	VIBRESCOPIC II STOCK BREEDER	Ideal for all types of grounds (even very hard). Maximum productivity and safety. Certified for working with only one user.	Safety Productivity Post driving quality	100
			VIBRESCOPIC PRO STOCK BREEDER			
	Wine maker, arborist	Hammer with halyard	Tilting mast VITI	Ideal for flat grounds and low budget.	Flat striking	103
		Vibration with striking head	VIBRESCOPIC II VITI VIBRESCOPIC III VITI VIBRESCOPIC PRO VITI	Ideal for very hard soil, for productivity and safety. Certified for working with only one user.	Safety Productivity Post driving quality	104
VIBRESCOPIC 150	Ideal for small wooden and iron posts (diameter 80mm max. and for activity limited in time).		Price Simple	110		
Grape harvesting machine Straddle tractor Tool carrier	Wine maker, agricultural cooperative, farm contractor	Vibration with striking head	VIBRESCOPIC II on STILTOR PELLENC BRAUD	The only machine customizable and powerful on all these kinds of carriers.	Safety Productivity Post driving quality	108
Mini-excavator and backhoe loader	Farm contractor, civil engineer, fencing contractor	Vibration with striking head	VIBRESCOPIC II PE	The only machine customizable and powerful on all these kinds of carriers.	Safety Productivity Post driving quality	112
On road trailer	Rental agency, CUMA, landscaper	Vibration with striking head	VIBRESCOPIC 15/35 M	New model mounted on a road trailer and driven by an internal combustion engine.	Safety Productivity Post driving quality	111



Post driver TURBOFRAP 200



Vibrating post driver
VIBRESCOPIC STOCK BREEDER



Vibrating post driver
VIBRESCOPIC (straddle tractor)




Vibrating post driver
VIBRESCOPIC II PRO PE



VIBRESCOPIC PRO VITI on front linkage



VIBRESCOPIC PRO VITI at transport

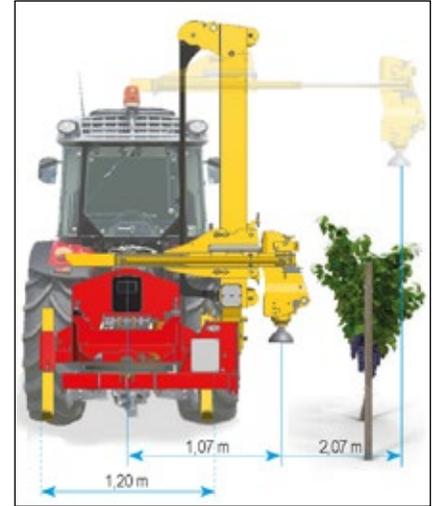

VIBRESCOPIC PRO VITI on rear linkage

+ Rabaud advantages

- Drives all posts (from 0.70 to 3.30 m length), in all types of grounds.
- Works in all positions : side shift, tilting and 200° rotation.
- Possibility of fitting an inclinometer to automatically correct tilt: manual or auto mode - RABAUD Exclusivity.
- Respects vegetation : 1 m hydraulic offset on the hammer head - RABAUD Exclusivity.
- Mini-handle to control the tool from its side or from the driver's cab.
- Depth-of-drive adjustment via thumbwheel - RABAUD Exclusivity.
- Duplex mast with dual effect
- Percussion hammer mounted on an anti-wear slide.
- The slightly concave cover head re-centers the post without damaging it during driving.

Technical characteristics

MODEL	VIBRESCOPIC PRO VITI
<i>Maximum post length</i>	From 0,70 / to 3,30 m
<i>Striking head Ø</i>	150 mm
<i>Hammer percussion</i>	1500 strokes/min
<i>Hydraulic offset</i>	1m (2,07 m from the tractor axle)
<i>Inner/outer mast tilt</i>	18° int. / 25° ext.
<i>Hydraulic rotation</i>	200°
<i>Dimensions (L x W x H)</i>	1,20 x 1,79 x 2,94 m
<i>Weight (without option)</i>	928 kg
<i>Drive</i>	Tractor pump with 2 couplers(PDF 540 tr/min in option)
<i>Coupling</i>	3-point hitch N°2

Standard equipment

- Striking head Ø 150 mm.
- "Duplex" mast for posts up to 3.30 m.
- Hydraulic side shift of the striking head 1.00 m.
- Operator-adjustable depth gauge.
- Support stands.

2 YEARS HAMMER AND STRIKING HEAD WARRANTY

MODELS	£	Reference
VIBRESCOPIC PRO VITI - 220° hydraulic rotation 4-way dual acting valve with electro-hydraulic control	 23,725	70375C
OPTIONS		
Independent hydraulic unit on rear 3-point linkage, PTO 540 rpm with 45 L/min. pump, 80L tank	Contact us	
Pre-hole bar Ø 55 mm + hydraulic extraction	1,795	70301C
Pre-hole bar alone Ø 55 mm - 1.60 m long	855	70305C
Oil cooler – electric supply by 3-pin plug	985	70381C
Automatic adjustment of tilting mast with tilt meter	1,865	70303C

SELECT THE RIGHT COVER HEAD FOR METAL STAKES

Cover head and support to select



See page 105