



SUPERNET 1600 A on tractor



SUPERNET 2100 A




SUPERNET 1600 A on compact loader




- 4 sweeping widths, from 1,60 m up to 2,40 m.
- Adaptation on rear 3-point hitch or on front and compact loader.
- Floating coupling on the top link to follow the road form.
- Mechanical angling coupling allowing to push away the trash on the right or on the left.
- Side-shift separated from angling with quick mechanical sliding.
- Mixed (Polyester/Polypropylene) or polypropylene brush on SUPERNET 2100 et 2400.
- Option side brush Ø 550 mm.
- High resistance for the brush thanks to metal hub/axle.
- Longer fibres for greater durability: inner Ø 127 mm / outer Ø 550 mm.
- 2 rubber-tyred terrage wheels (Ø 200 mm), pivoting and height-adjustable with spacers.

Standard equipment

- Two wheels adjustable in height with spacer.
- Hydraulic motor positioned on the left with 2 hydraulic hoses and 2 ½" male valve couplings.
- Mechanical offset +/- 300 mm.
- Mechanical angling +/- 20°.
- Stands for storage.

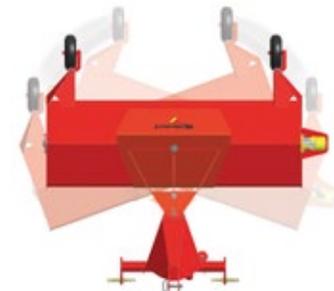

Orientation

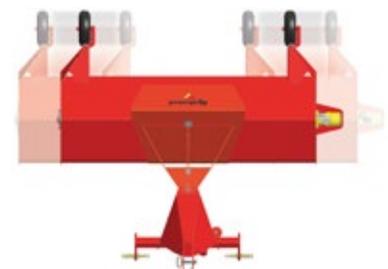

Offset

Technical characteristics

MODELS	SUPERNET 1600 A	SUPERNET 1800 A	SUPERNET 2100 A	SUPERNET 2400 A
Brush length	1585 mm	1785 mm	2080 mm	2380 mm
Diameter (inner / outer)	127 mm / 550 mm			
Hub	Metal			
Brush fibre type	Mixed (Polypropylene/polyester)		Mixed (Polypropylene/polyester) or Polypropylene	
Angling	Mechanical on the right 20° / on the left 20° and in the axle			
Offset	Mechanical 300 mm on the right / 300 mm on the left			
Collecting box capacity (real/useful volume)	170 L / 120 L	190 L / 135 L	220 L / 150 L	250 L / 170 L
Dimensions (L x W x H) with tractor hitch	1,83 x 1,87 x 1,08 m	1,83 x 2,07 x 1,08 m	1,83 x 2,36 x 1,08 m	1,83 x 2,66 x 1,08 m
Weight (3-point version)	220 kg	233 kg	251 kg	270 kg
Coupling	3-point linkage N°1 and N°2. Floating system on the top point / front and compact loaders			
Drive	Hydraulic carrier pump with 2 ½" male valve couplings			
Oil flow	15 L/min. mini. (30 L/min. mini. with side brush) - 60 L/min. max.			
Pressure	120 bar up to 200 bar maxi			



					£	Reference				
MODELS										
SUPERNET 1600 A - Without coupling • With mixed brush (polypropylene/polyester)					2,070	72010H				
SUPERNET 1800 A - Without coupling • With mixed brush (polypropylene/polyester)					2,215	72012H				
SUPERNET 2100 A - Without coupling • With polypropylene brush					2,195	72013H				
• With mixed brush (polypropylene/polyester)					2,320	72014H				
SUPERNET 2400 A - Without coupling • With polypropylene brush					2,545	72056J				
• With mixed brush (polypropylene/polyester)					2,655	72057J				
COUPLING HITCH > OBLIGATORY TO DETERMINE										
• 3-point linkage rear					390	72015H				
• Front and compact loaders					1,055	76415A				
OPTIONS					1600 A	1800 A	2100 A	2400 A		
Hydraulic angling (only on SUPERNET with tractor 3-point linkage)					•	•	•	•	400	72069G
Anti-projection guard					•				120	72040C
						•			130	72041C
							•		150	72042C
								•	170	72058J
Collecting box (only on SUPERNET with tractor 3-point linkage) Be careful when using it on roads! - minimum hydraulic flow of 30 l/min					•				695	72043C
						•			725	72044C
							•		800	72045C
								•	890	72059J
Side brush Ø 550 mm with hydraulic motor, hoses, 3-way valve					•	•	•	•	930	72039C
SPARE BRUSHES										
Side brush Ø 550 mm									125	055A25
Polypropylene brush Ø 550 mm value for 1 m									215	24F002
Mixed brush ring (polypropylene/polyester) Ø 550 mm with staple, value for 1 m									265	24F003

35 l/min hydraulic power unit with pump, 30 L tank, oil, transmission, 1DE notched distributor ref.70169A = Ideal for tractors with low hydraulic flow (consult us for RATE)
The ● means compatibility of options with different models.

✓ OPTIONS



Side brush Ø 550 mm hoses, 3-way valve
(standard version with central brush)



Collecting box, manual unlocking



Anti-projection guard