

**LIFTING CAPACITY**

1180 Kg [B] (with counterweights)

**BOOM HEIGHT**

2945 mm


**ENGINE POWER**

25 HP

**HYDRAULIC SYSTEM**



47 l/min




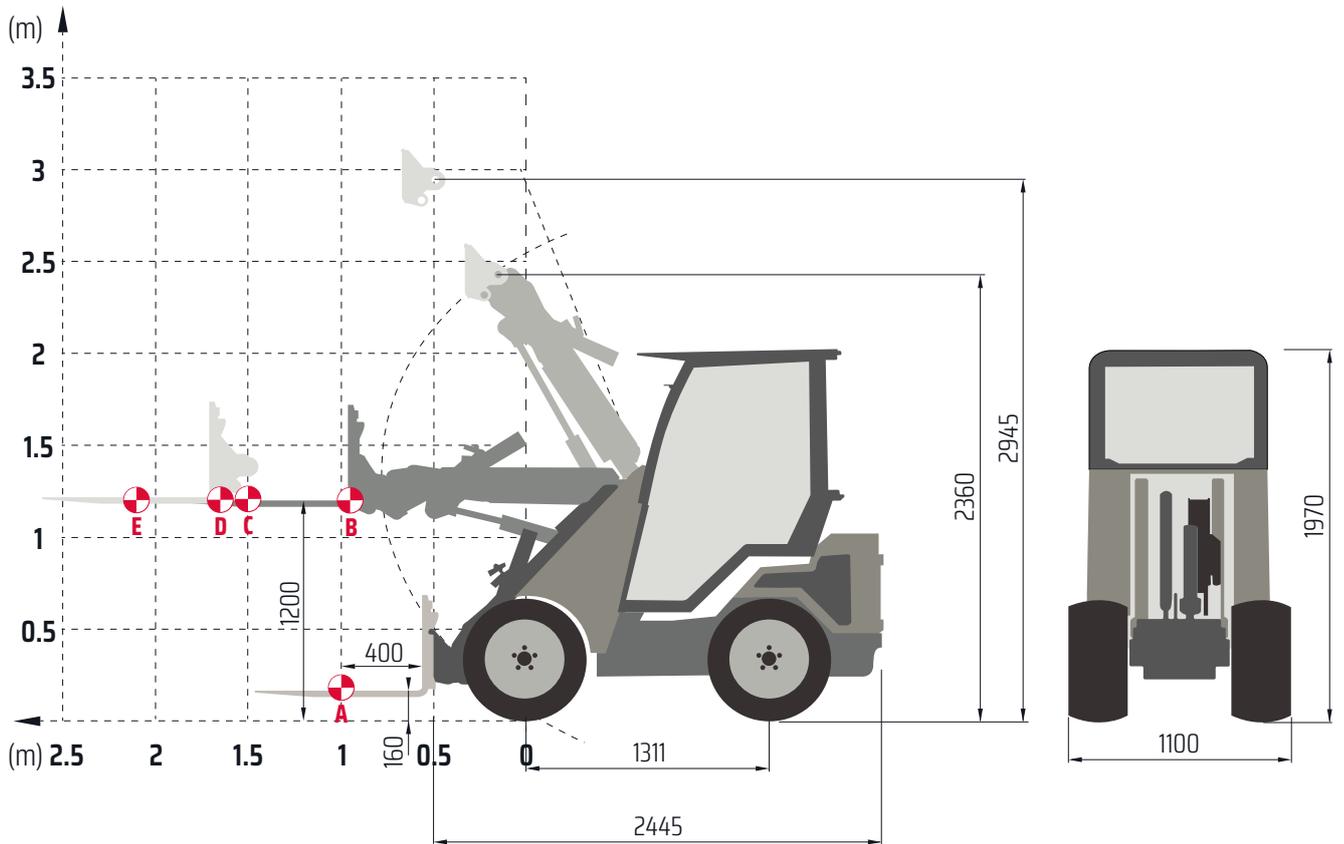

TIPPING LOAD

- A** Transport position
- B** Boom horizontal (without pallet fork)
- C** Boom horizontal
- D** Boom horizontal + extension
- E** Boom horizontal + extension

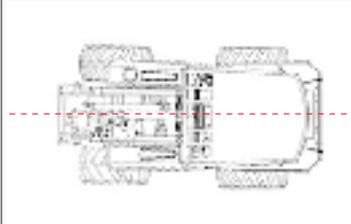				
	BALLAST (200 kg)	NO BALLAST	BALLAST (200 kg)	NO BALLAST
A	1000 Kg	806 Kg	700 Kg	588 Kg
B	1180 Kg	990 Kg	860 Kg	720 Kg
C	840 Kg	705 Kg	610 Kg	512 Kg
D	760 Kg	640 Kg	550 Kg	460 Kg
E	620 Kg	520 Kg	450 Kg	380 Kg

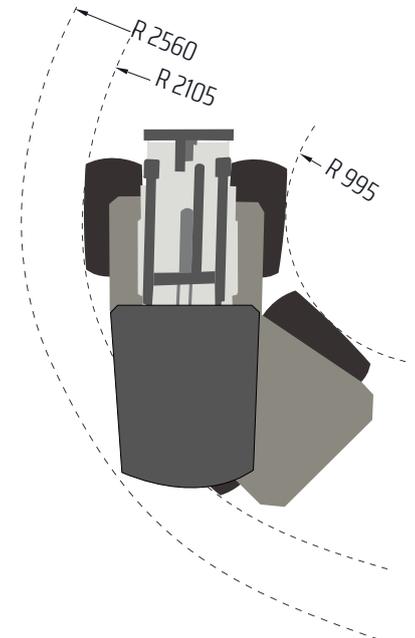

STANDARD SET-UP

Engine	Yanmar 3TNV80
Power Hp / Kw	25 / 18,5
Hydrostatic transmission - 4WD	Standard
Electric differential lock	Standard
Water cooling	Standard
Hydraulic selflevelling	Standard
Hydraulic system l/min	47
Joystick	5- function
12 V power outlet + 165 W front auxiliary electric outlet	Standard
Working LED lights (2 front + 1 rear)	Standard
Adjustable ergonomic seat with belts	Standard
"UNIVERSAL" coupling plate	Standard
Metal hoods	Standard
ROPS+FOPS protection	Standard
Telescopic boom	Standard
Tractor wheels	26x12.00-12
Weight Kg	1270

 CODE WITH STANDARD SET-UP

P	3	0	1	2	0	0	0	1	M	1
---	---	---	---	---	---	---	---	---	---	---

 MORE DATA

Tipping load in transport position (Kg)	1100 [A]
Max pulling force (Kg)	660 @ 26x12.00-12
Breakout force with boom down (Kg)	900
Average sound power level (dB/LwA)	99
Guaranteed sound power level (dB/LwA)	101
Speed (km/h)	14
Engine oil tank capacity (L)	4,2
Hydraulic oil tank capacity (L)	30

 WHEELS


SKID
23x8.50-12
23x10.50-12
26x12.00-12



ALL TRAC
8PR
300/60X12



TRACTOR
23x8.50-12
23x10.50-12
26x12.00-12



TURF
23x8.50-12
23x10.50-12
24x13.00-12
26x12.00-12

OPTIONS

4	5	1	2	0	1	7	0	Hydraulic rear outlets
4	5	1	2	0	0	3	5	Hydraulic rear 3 point set-up for lifter
4	5	1	2	0	1	7	1	Electric floating system
4	5	1	2	0	0	7	2M	Difference for Kubota D1105 and Poclairn Wheel Motor single speed "High Power"
4	5	1	2	0	0	9	6	Difference for Poclairn Wheel Motor single speed "High Power" (With Yanmar 3TNV80)
4	5	1	2	0	2	8	1M	Difference for Kubota D1105 and Poclairn Wheel Motor dual speed
4	5	1	2	0	0	9	7	Difference for Poclairn Wheel Motor dual speed (With Yanmar 3TNV80)
4	5	1	2	0	1	9	8	Difference for Kubota D1105 and Poclairn Wheel Motor single speed
4	5	1	2	0	1	9	7	Difference from standard wheel motor to Poclairn single speed (with Yanmar 3TNV80)
4	5	1	2	0	2	3	6	Difference for high power LED working lights (2 front+1 rear)
4	5	1	2	0	1	7	2	Driving lights
4	5	1	2	0	2	4	1	Rear-view mirrors
4	5	1	2	0	1	0	5	Rear counterweights (100 Kg)
4	5	1	2	0	1	7	3M	Integrated counterweights (95 Kg)
4	5	1	2	0	2	4	3	Rear counterweights (210 Kg) - Trailer coupling (automotive) cod. 45120133 not compatible
4	5	1	2	0	1	7	4	Insulated rear hood
4	5	1	2	0	3	1	9	Difference from standard to tractor wheels 23x8.50-12
4	5	1	2	0	2	2	7	Difference from standard to turf wheels 26x12.00-12
4	5	1	2	0	1	8	7	Difference from standard to turf wheels 24x13.00-12
4	5	1	2	0	2	6	3	Difference from standard to skid wheels 26x12.00-12
4	5	1	2	0	2	2	9	Difference from standard to tractor wheels 23x10.50-12
4	5	1	2	0	1	9	1	Difference from standard to turf wheels 23x10.50-12
4	5	1	2	0	2	1	4	Difference from standard to turf wheels 26.50x14.00-12 only with Poclairn Wheel Motor
4	5	1	2	0	2	7	3	Difference from standard to all trac wheels 300/60X12
4	5	1	2	0	1	0	7	Extra cost for 2 gel filled-wheels (only 26x12.00-12)
4	5	1	2	0	1	7	5	Winter protection (front wind+screenwiper)
4	5	1	2	0	1	8	6	Cabin with heating system
4	5	1	2	0	3	2	7	Heating system (Only for 30T)
4	5	1	2	0	3	6	0	Heating system (Only for 30T Carbon)
4	5	1	2	0	2	3	2	Pre-heating of engine water
4	5	1	2	0	1	3	3	Trailer coupling for 100 Kg rear counterweights
4	5	1	2	0	1	7	6	Comfort seat
4	5	1	2	0	1	4	2	Comfort heated seat
4	5	1	2	0	3	0	0	Ergonomic seat with headrest and armrest
4	5	1	2	0	3	4	1	Adjustable right armrest in soft rubber
4	5	1	2	0	1	7	9	Dual hydraulic function for boom lift + telescopic (includes 11 function)
4	5	1	2	0	3	1	3	Side safety protection
4	5	1	2	0	1	9	9	Pair snowchains + wheel spacers 23x10.50-12
4	5	1	2	0	1	6	2	Wheel spacers for snow chains (for 4 wheels)
4	5	1	2	0	2	1	0	Quick coupling system "MULTIFASTER" ® Part fixed on the machine
4	5	1	2	0	2	1	1	Quick coupling system "MULTIFASTER" ® Part for the attachments
4	5	1	2	0	1	8	1	Rear auxiliary electric outlet (165 W)
4	5	1	2	0	3	5	6	Radiator protection grid
4	5	1	2	0	2	9	3	Trailer coupling for 200 Kg rear counterweights
4	5	1	2	0	0	2	4	Dual hydraulic function for boom lift + hydraulic outlets (includes 11- function)
4	5	1	2	0	0	1	3	Lockable fuel cap
4	5	1	2	0	0	5	3	Predisposition for road omologation (no Italy)
4	5	1	2	1	0	2	2	13 pin socket
4	5	1	2	0	1	9	5	Difference for Kubota D1105
4	5	1	2	0	0	9	5	Double independent front outlet + electronic distributor