

40XD



LIFTING CAPACITY

□ 2000 Kg [B] (with counterweights)



BOOM HEIGHT

□ 3300 mm



ENGINE POWER

□ 38 HP




HYDRAULIC SYSTEM

□ 66 l/min






40XD

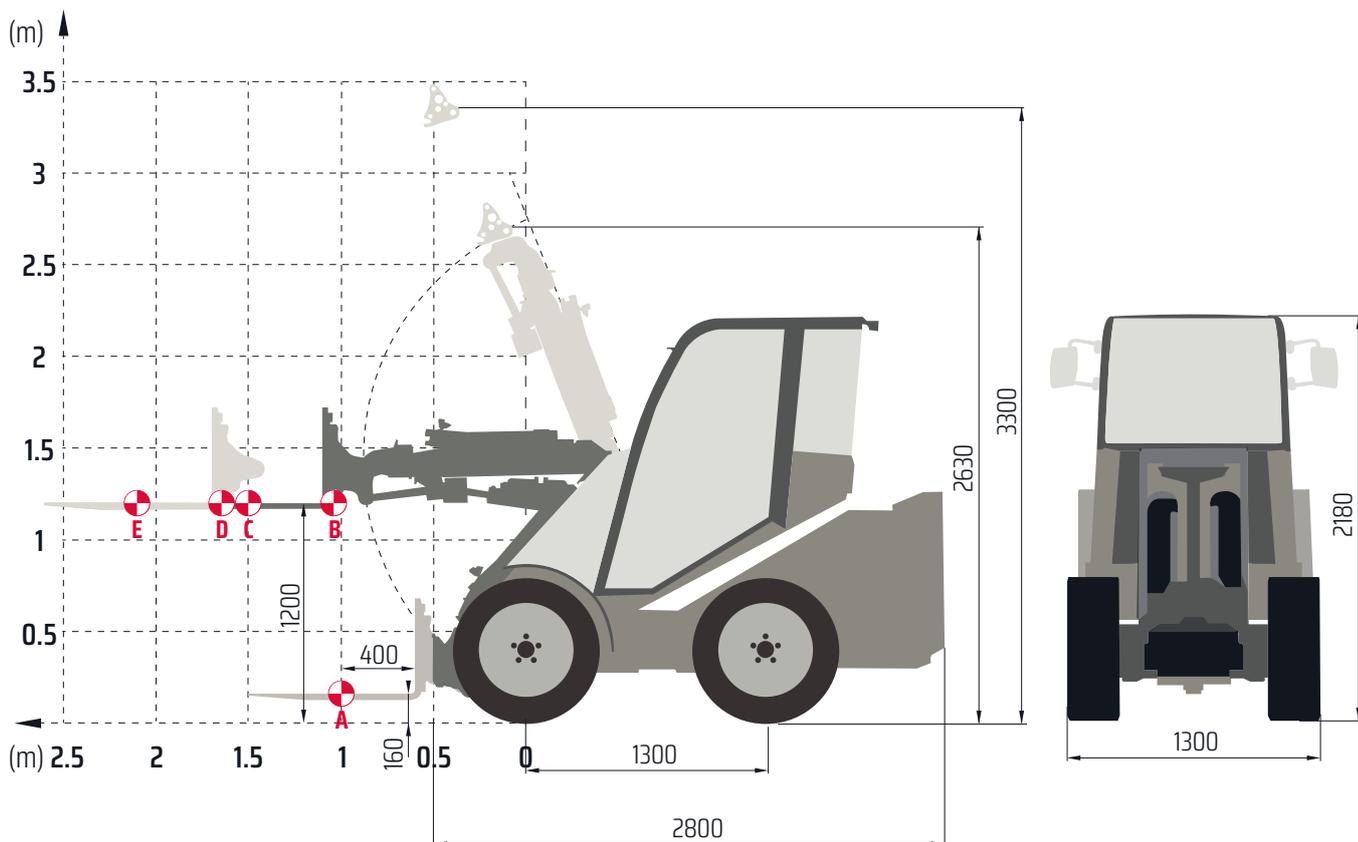

TIPPING LOAD

- A Transport position
- B Boom horizontal (without pallet fork)
- C Boom horizontal
- D Boom horizontal + extension
- E Boom horizontal + extension

				
	BALLAST (200 kg)	NO BALLAST	BALLAST (200 kg)	NO BALLAST
A	1500 Kg	1300 Kg	1350 Kg	1000 Kg
B	2000 Kg	1650 Kg	1750 Kg	1300 Kg
C	900 Kg	800 Kg	600 Kg	550 Kg
D	1000 Kg	900 Kg	700 Kg	650 Kg
E	600 Kg	520 Kg	400 Kg	400 Kg

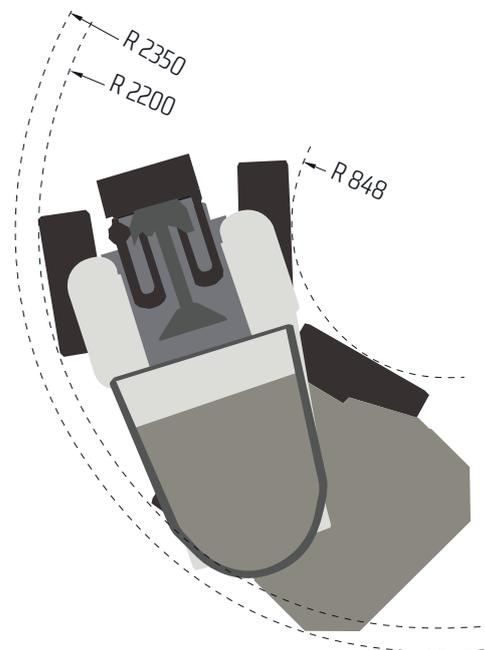

40XD

STANDARD SET-UP

Engine	Yanmar Stage V
Power HP/Kw	38/28,3
Hydrostatic transmission - 4WD	Standard
Electric differential lock	Standard
Water cooling	Standard
Double cylinder hydraulic selflevelling	Standard
Hydraulic system l/min	66
Articulated chassis with 4 steering wheels	Standard
Joystick	11- function
12 V power outlet + 165 W front auxiliary electric outlet	Standard
Working LED lights (2 front + 1 rear)	Standard
Digital dashboard with acoustic warnings signals	Standard
Ergonomic seat + headrest and armrest+safety belts	Standard
Roof with sunshade	Standard
"UNIVERSAL" coupling plate	Standard
Front and rear metal hoods	Standard
ROPS/FOPS protection	Standard
Telescopic boom	Standard
Tractor wheels	29x12.50-15
Weight Kg	2100

CODE WITH STANDARD SET-UP

G 4 0 2 0 0 0 0 1

MORE DATA

Tipping load in transport position (Kg)	1500 [A]
Max pulling force (Kg)	1260 @ 29x12.50-15
Breakout force with boom down (Kg)	1500
Average sound power level (dB/LwA)	99
Guaranteed sound power level (dB/LwA)	101
Speed (km/h)	16
Engine oil tank capacity (L)	5,0
Hydraulic oil tank capacity (L)	70

WHEELS



ALL TRAC
31x15.50-15



TRACTOR
29x12.50-15
31x15.50-15 offset 55



TURF
29x12.50-15
31x15.50-15

40XD

OPTIONS

4	5	1	2	0	3	5	5	Electric floating system
4	5	1	2	0	0	3	2	Anti-skid
4	5	1	2	0	1	4	7	Rear 3 point set-up for lifter (double flow)
4	5	1	2	0	1	2	8	Driving lights
4	5	1	2	0	1	4	4	Independent rear-outlet + 15- function joystick
4	5	1	2	0	3	3	7	Rear-counterweights (Kg 210) + integrated counterweights (Kg 130)
4	5	1	2	0	1	2	9	Integrated counterweights (Kg 150)
4	5	1	2	0	2	9	3	Trailer coupling for 210 Kg rear counterweights
4	5	1	2	0	0	4	0	Quick coupling system "MULTIFASTER" @ Part fixed on the machine
4	5	1	2	0	2	1	1	Quick coupling system "MULTIFASTER" @ Part for the attachments
4	5	1	2	0	0	1	0	Cabin with heating system and rear-view mirrors
4	5	1	2	0	1	5	1	Heated fabric seat
4	5	1	2	0	3	4	6	Mechanical suspension for adjustable ergonomic seat
4	5	1	2	0	3	5	1	Cabin with air conditioning and heating system
4	5	1	2	0	3	3	2	Pre-heating of engine's water
4	5	1	2	0	3	0	2	Rear auxiliary electric outlet (165 W)
4	5	1	2	0	3	3	8	Difference from 4 standard wheel motors to 4 "HIGH POWER" wheel motors
4	5	1	2	0	3	1	2	Difference from standard to turf wheels 29x12.5-15
4	5	1	2	0	0	2	6	Difference from standard to turf wheels 31x15.50-15
4	5	1	2	0	3	4	4	Difference from standard to tractor wheels 31x15.50-15 offset 55
4	5	1	2	0	0	2	7	Difference from standard to all trac wheels 31x15.50-15
4	5	1	2	0	0	2	0	Difference from standard to "All Black" version
4	5	1	2	0	0	4	1	Cylinders with anti-fall valve
4	5	1	2	0	3	6	8M	Windscreen with wiper