



LIFTING CAPACITY

2100 Kg [B] (with counterweights)



BOOM HEIGHT

3300 mm



ENGINE POWER


57 HP



HYDRAULIC SYSTEM



80 l/min




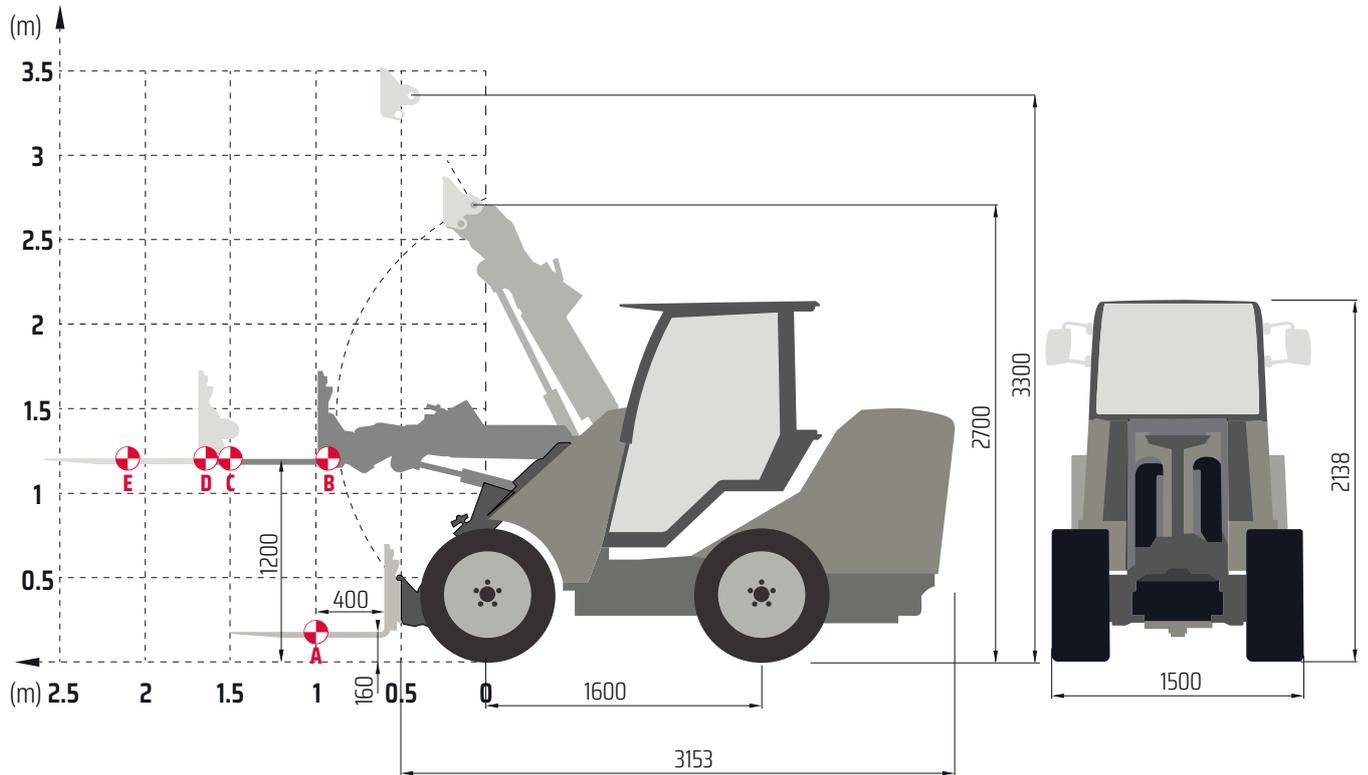

TIPPING LOAD

- A** Transport position
- B** Boom horizontal (without pallet fork)
- C** Boom horizontal
- D** Boom horizontal + extension
- E** Boom horizontal + extension

		
	BALLAST (400 kg)	BALLAST (400 kg)
A	1800 Kg	1500 Kg
B	2100 Kg	1700 Kg
C	1700 Kg	1500 Kg
D	1800 Kg	1300 Kg
E	1400 Kg	900 Kg

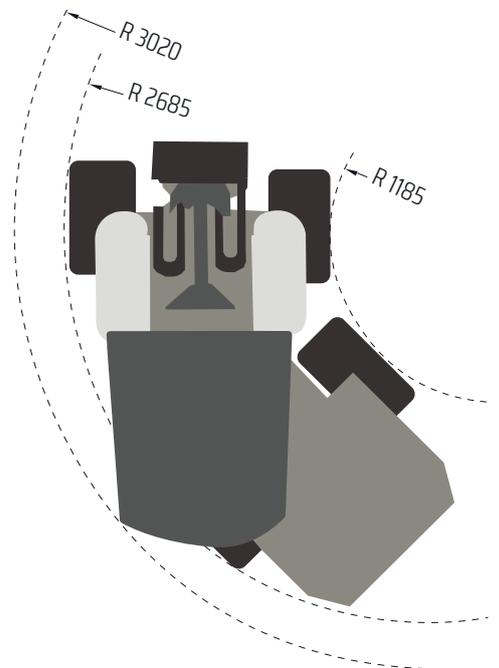

STANDARD SET-UP

Engine	Kohler KDI 1903TCR / STAGE V
Power Kw	42 @ 2600 RPM
Hydrostatic transmission - 4WD	Standard
Electric differential lock	Standard
Water cooling	Standard
Double cylinder hydraulic selflevelling	Standard
Hydraulic system l/min	80
Joystick	11- function
12 V power outlet + 165 W front auxiliary electric outlet	Standard
Working LED lights (2 front + 1 rear)	Standard
Digital dashboard	Standard
Adjustable ergonomic seat with belts and armrest	Standard
Poclaim single speed wheel motors	Standard
Metal hood (front)	Standard
Integrated counterweights 185 Kg	Standard
Tractor wheels	31x15.50-15
Dimensions mm	3153x1500x2138
Weight Kg	2300

 CODE WITH STANDARD SET-UP

P	5	7	1	2	0	0	0	0	4
---	---	---	---	---	---	---	---	---	---

 MORE DATA

Tipping load in transport position (Kg)	1800 [A]
Max pulling force (Kg)	1100 @ 31x15.50-15
Breakout force with boom down (Kg)	2600
Average sound power level (dB/LwA)	99
Guaranteed sound power level (dB/LwA)	101
Speed (km/h)	18
Engine oil tank capacity (L)	7,0
Hydraulic oil tank capacity (L)	80

 WHEELS


SKID
26x12.00-12
31x15.50-15



ALL TRAC
10PR
31x15.50-15
33x15.50-15



TRACTOR
26x12.00-12
33x15.50-15



TURF
26x12.00-12
31x15.50-15

OPTIONS

4	5	1	2	0	2	8	3	Electric floating system
4	5	1	2	0	2	8	4	Rear 3 point set-up for lifter (double flow)
4	5	1	2	0	0	2	1	Independent dual front outlets
4	5	1	2	0	0	1	8	Simultaneous dual front and rear outlets
4	5	1	2	0	2	8	8	Driving lights
4	5	1	2	0	3	4	8	Difference for Independent rear-outlet + 15- function joystick
4	5	1	2	0	2	9	0	Difference from 11- function joystick to 11- function ergonomic joystick
4	5	1	2	0	2	9	1	Rear-counterweights 250 Kg (210 Kg if associated to trailer coupling)
4	5	1	2	0	0	6	6	Rear-counterweights 210 Kg
4	5	1	2	0	2	9	3	Trailer coupling for 210 Kg rear counterweights
4	5	1	2	0	2	9	4	Winter protection (front windscreen+screenwiper)
4	5	1	2	0	0	2	3	Cabin with heating system
4	5	1	2	0	2	9	6	Heating system
4	5	1	2	0	3	5	0	Cabin with air conditioning and heating system
4	5	1	2	0	2	9	7	Kit of three rear-view mirrors
4	5	1	2	0	2	9	9	Heated fabric seat
4	5	1	2	0	3	1	3	Side safety protection
4	5	1	2	0	3	0	2	Rear auxiliary electric outlet (165 W)
4	5	1	2	0	3	0	3	Quick coupling system "MULTIFASTER" @ Part fixed on the machine
4	5	1	2	0	2	1	1	Quick coupling system "MULTIFASTER" @ Part for the attachments
4	5	1	2	0	3	0	5	Soundproof rear hood
4	5	1	2	0	3	0	7	Difference from standard to skid wheels 31x15.50-15
4	5	1	2	0	3	1	5	Difference from standard to turf wheels 31x15.50-15
4	5	1	2	0	3	4	7	Difference from standard to all trac wheels 33x15.50-15
4	5	1	2	0	3	5	2	Difference from standard to all trac wheels 31x15,50-15
4	5	1	2	0	3	5	7	Radiator protection grid
4	5	1	2	0	0	3	3	Difference from standard to All Black (version with cabin), A/C and heating system
4	5	1	2	0	3	5	8	Difference from standard to All Black (version without cabin)
4	5	1	2	0	0	5	1	Cylinders with anti-fall valve
4	5	1	2	0	0	3	9	Predisposition for road omologation (no Italy)



LIFTING CAPACITY

□ 2100 Kg [B] (with counterweights)



BOOM HEIGHT

□ 3300 mm



ENGINE POWER


□ 57 HP



HYDRAULIC SYSTEM



□ 80 l/min




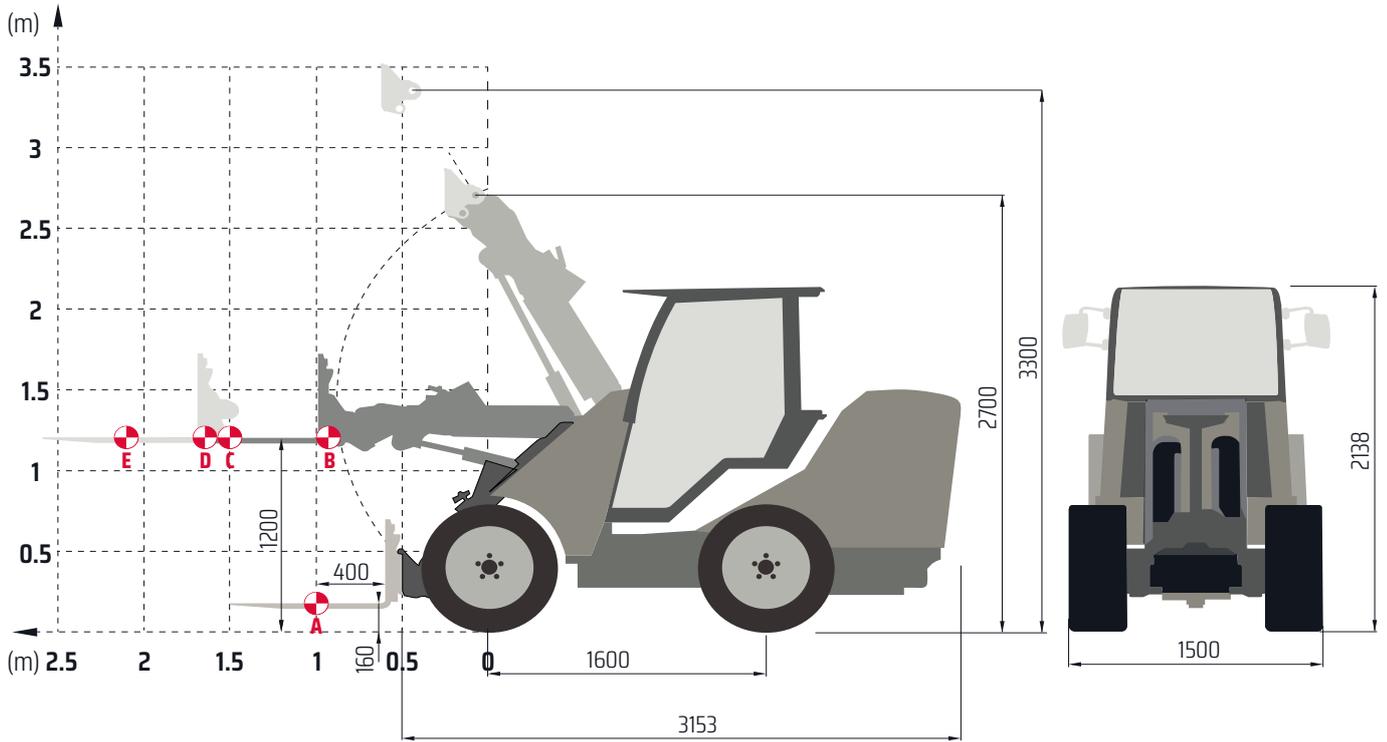

TIPPING LOAD

- A** Transport position
- B** Boom horizontal (without pallet fork)
- C** Boom horizontal
- D** Boom horizontal + extension
- E** Boom horizontal + extension

		
	BALLAST (400 kg)	BALLAST (400 kg)
A	1800 Kg	1500 Kg
B	2100 Kg	1700 Kg
C	1700 Kg	1500 Kg
D	1800 Kg	1300 Kg
E	1400 Kg	900 Kg

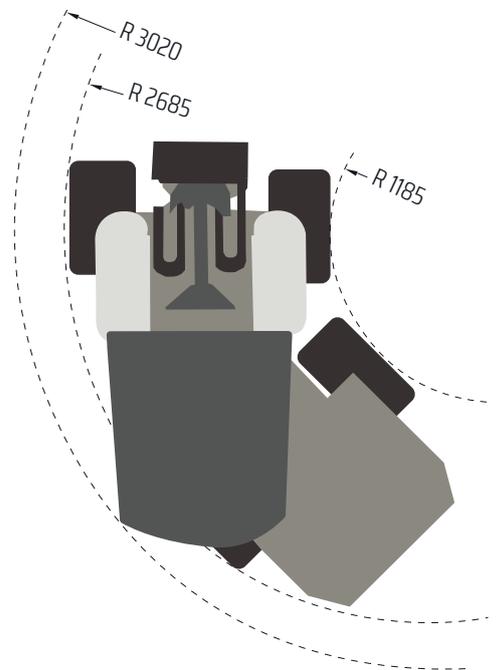

STANDARD SET-UP

Engine	Kohler KDI 1903TCR / STAGE V
Power Kw	42 @ 2600 RPM
Hydrostatic transmission - 4WD	Standard
Electric differential lock	Standard
Water cooling	Standard
Double cylinder hydraulic selflevelling	Standard
Hydraulic system l/min	80
Joystick	11- function
12 V power outlet + 165 W front auxiliary electric outlet	Standard
Working LED lights (2 front + 1 rear)	Standard
Digital dashboard	Standard
Adjustable ergonomic seat with belts and armrest	Standard
Poclaim dual speed wheel motors	Standard
Metal hood (front)	Standard
Integrated counterweights 185 Kg	Standard
Tractor wheels	31x15.50-15
Dimensions mm	3153x1500x2138
Weight Kg	2350

 CODE WITH STANDARD SET-UP


P	5	7	1	2	0	0	0	0	2
---	---	---	---	---	---	---	---	---	---

 MORE DATA

Tipping load in transport position (Kg)	1800 [A]
Max pulling force (Kg)	1500-800 @ 31x15.50-15
Breakout force with boom down (Kg)	2600
Average sound power level (dB/LwA)	99
Guaranteed sound power level (dB/LwA)	101
Speed (km/h)	10-30
Engine oil tank capacity (L)	7,0
Hydraulic oil tank capacity (L)	80

 WHEELS


SKID
26x12.00-12
31x15.50-15



ALL TRAC
10PR
31x15.50-15
33x15.50-15



TRACTOR
26x12.00-12
33x15.50-15



TURF
26x12.00-12
31x15.50-15

OPTIONS

4	5	1	2	0	2	8	3	Electric floating system
4	5	1	2	0	2	8	4	Rear 3 point set-up for lifter (double flow)
4	5	1	2	0	0	2	1	Independent dual front outlets +15 funct. Joystick
4	5	1	2	0	0	1	8	Independent dual front outlets + 1 simultaneous rear connec. to the front left outlet +15 funct. joystick
4	5	1	2	0	2	8	8	Driving lights
4	5	1	2	0	3	4	8	Independent rear-outlet + 15- function joystick
4	5	1	2	0	2	9	0	Difference from 11- function joystick to 11- function ergonomic joystick
4	5	1	2	0	2	9	1	Rear-counterweights 250 Kg (210 Kg if associated to trailer coupling)
4	5	1	2	0	0	6	6	Rear-counterweights 210 Kg
4	5	1	2	0	2	9	3	Trailer coupling for 210 Kg rear counterweights
4	5	1	2	0	2	9	4	Winter protection (front windscreen+screenwiper)
4	5	1	2	0	0	2	3	Cabin with heating system
4	5	1	2	0	2	9	6	Heating system
4	5	1	2	0	3	5	0	Cabin with A/C and heating system
4	5	1	2	0	2	9	7	Kit of three rear-view mirrors
4	5	1	2	0	2	9	9	Heated fabric seat
4	5	1	2	0	3	1	3	Side safety protection
4	5	1	2	0	3	0	2	Rear auxiliary electric outlet (165 W)
4	5	1	2	0	3	0	3	Quick coupling system "MULTIFASTER" @ Part fixed on the machine
4	5	1	2	0	2	1	1	Quick coupling system "MULTIFASTER" @ Part for the attachments
4	5	1	2	0	3	0	5	Soundproof rear hood
4	5	1	2	0	3	0	7	Difference from standard to skid wheels 31x15.50-15
4	5	1	2	0	3	1	5	Difference from standard to garden wheels 31x15.50-15
4	5	1	2	0	3	4	7	Difference from standard to all trac wheels 33x15.50-15
4	5	1	2	0	3	5	2	Difference from standard to all trac wheels 31x15.50-15
4	5	1	2	0	3	5	7	Radiator protection grid
4	5	1	2	0	0	3	3	Difference from standard to All Black (version with cabin), A/C and heating system
4	5	1	2	0	3	5	8	Difference from standard to All Black (version without cabin)
4	5	1	2	0	0	5	1	Cylinders with anti-fall valve
4	5	1	2	0	0	3	9	Predisposition for road omologation (no Italy)