



LIFTING CAPACITY

□ 1400 Kg [B]



BOOM HEIGHT

□ 2980 mm



ENGINE POWER


□ 15 kW



HYDRAULIC SYSTEM

□ 25 l/min




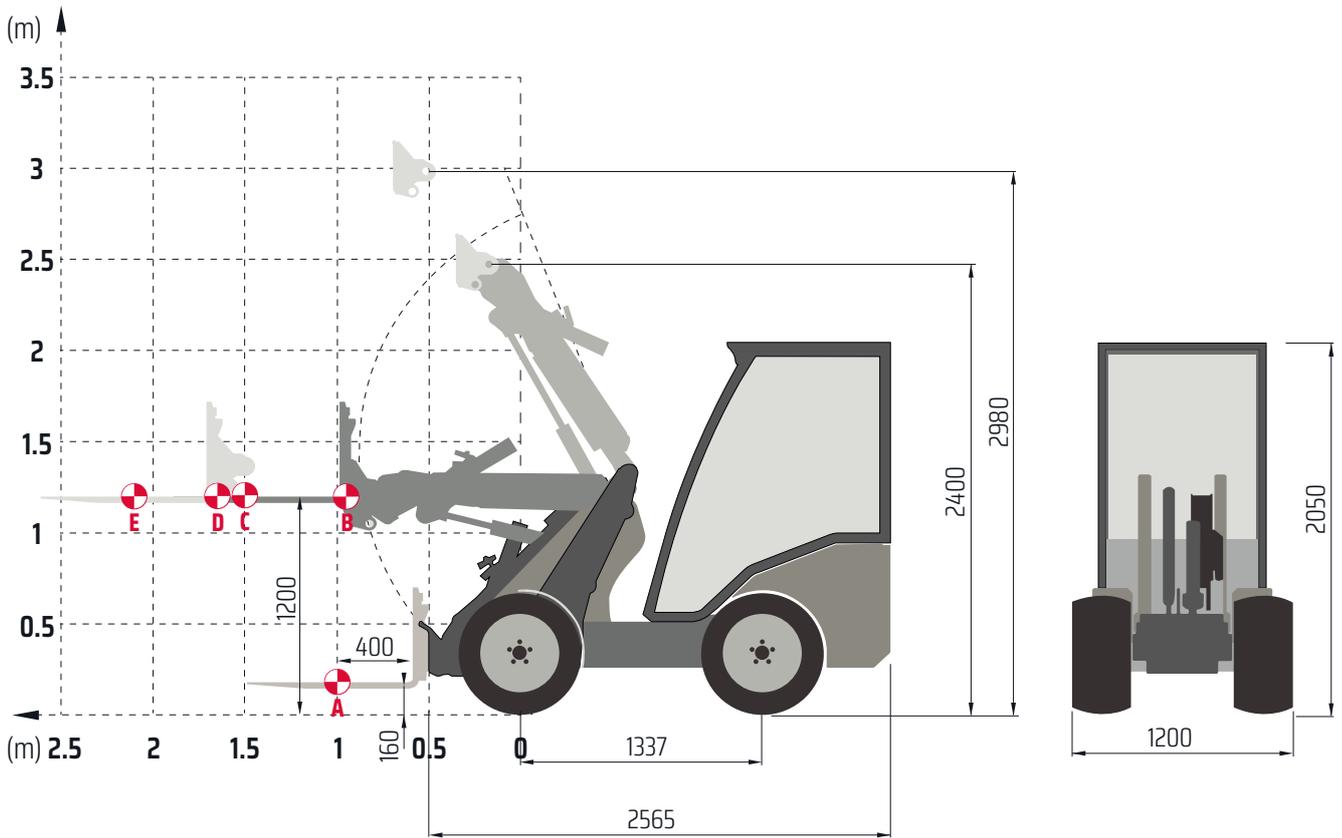

TIPPING LOAD

- A** Transport position
- B** Boom horizontal (without pallet fork)
- C** Boom horizontal
- D** Boom horizontal + extension
- E** Boom horizontal + extension

	ELECTROLYTE		LITHIUM (ballast)	
A	1000 Kg	1000 Kg	640 Kg	640 Kg
B	1400 Kg	1400 Kg	910 Kg	910 Kg
C	800 Kg	800 Kg	544 Kg	544 Kg
D	750 Kg	750 Kg	480 Kg	480 Kg
E	600 Kg	600 Kg	380 Kg	380 Kg

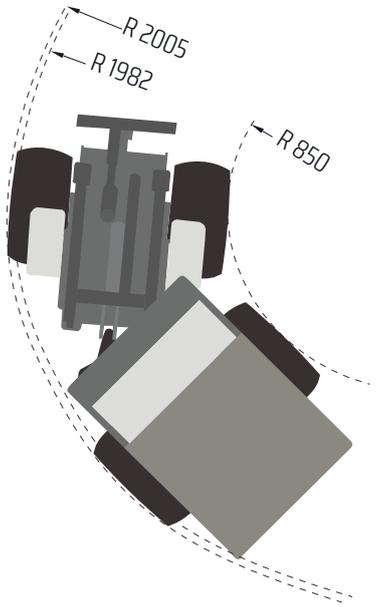

STANDARD SET-UP

Engine	Electric, 2 permanent magnets
Battery type	Traction battery
Rated Voltage (V) and Rated Capacity (Ah)	51,2 - 210
Power Kw	15
Hydrostatic transmission - 4WD	Standard
Electric differential lock	Standard
Hydraulic system l/min	25
Hydraulic oil tank capacity (l)	25
Selflevelling	Standard
Joystick	14- function
12 V power outlet	Standard
Adjustable ergonomic seat with safety belts	Standard
"UNIVERSAL" coupling plate	Standard
Working led lights (2 front + 1 rear)	Standard
ROPS+FOPS protection	Standard
Telescopic boom	Standard
Silent block	Standard
Tractor wheels	23x8.50-12
Weight Kg	1525

CODE WITH STANDARD SET-UP

8 0 0 E 0 0 2

CONTINUOUS 220V ELECTRONIC BATTERY CHARGER INCLUDED

MORE DATA

Tipping load in transport position (Kg)	1000 [A]
Max pulling force (Kg)	670
Breakout force with boom down (Kg)	980
Speed (km/h)	12@ 26x12.00-12
Hydraulic oil tank capacity (L)	29

WHEELS



SKID
23x8.50-12
26x12.00-12
5.70-12



ALL TRAC
8PR
300/60X12



TRACTOR
23x8.50-12
23x10.50-12
26x12.00-12
7.00-12



TURF
23x8.50-12
23x10.50-12
24x13.00-12
26x12.00-12

OPTIONS

4	5	1	2	0	0	4	8	Electric floating system	
4	5	1	2	0	2	3	9	Difference for High power Working LED lights (2 front + 1 rear)	
4	5	1	2	0	2	4	1	Rear-view mirrors	
4	5	1	2	0	2	4	7	Difference from standard to turf wheels 23x10.50-12	
4	5	1	2	0	0	5	0	Difference from standard to turf wheels 26x12.00-12	
4	5	1	2	0	1	8	3	Difference from standard to turf wheels 24x13.00-12	
4	5	1	2	0	2	5	0	Difference from standard to skid wheels 26x12.00-12	
4	5	1	2	0	0	5	8	Difference from standard to tractor wheels 23x10.50-12	
4	5	1	2	0	0	5	5	Difference from standard to tractor wheels 7.00-12	
4	5	1	2	0	0	2	9	Difference from standard to skid wheels 5.70-12	
4	5	1	2	0	0	5	7	Difference from standard to tractor wheels 26x12.00-12	
4	5	1	2	0	2	7	4	Difference from standard to all trac wheels 300/60X12	
4	5	1	2	0	2	2	5	Winter protection (front wind+screenwiper)	
4	5	1	2	0	0	0	9	Cabin with heating system	
4	5	1	2	0	0	4	3	3 sides glass cabin	
4	5	1	2	0	0	4	9	Heating system	
4	5	1	2	0	3	3	5	Trailer coupling (automotive), towing capacity about 1000 Kg	
4	5	1	2	0	1	7	6	Comfort seat	
4	5	1	2	0	1	4	2	Comfort heated seat	
4	5	1	2	0	3	0	0	Ergonomic seat with headrest and armrest	
4	5	1	2	0	3	3	4	Right armrest of the seat	
4	5	1	2	0	2	2	0	Front auxiliary electric outlet 165 W	
4	5	1	2	0	3	4	0	Side safety protection	
4	5	1	2	0	1	6	2	Wheel spacers for snow chains (for 4 wheels)	
4	5	1	2	0	2	3	4	Pair snowchains + wheel spacers 23X8.50-12	
4	5	1	2	0	2	1	0	Quick coupling system "MULTIFASTER" @ Part fixed on the machine	
4	5	1	2	0	2	1	1	Quick coupling system "MULTIFASTER" @ Part for the attachments	
4	5	1	2	0	0	1	4	Difference from traction battery to lithium battery	
4	5	1	2	0	0	4	2	Difference from traction battery to maintenance-free dry battery	0
4	5	1	2	0	3	6	5	LED light	1.179,00
4	5	1	2	0	3	6	7	Blue spot light	90,00