




TRH MANUAL



TRH MANUAL

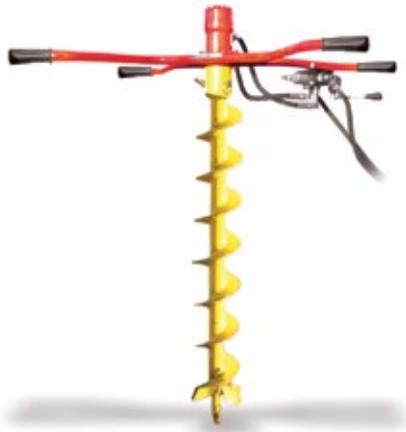

TRH MANUAL with FENOX mooring



- Simple use with 2 persons with hydraulic motor.
- Works with the hydraulic of all carriers : minimum oil flow 20 L/min.
- Hydraulic valve to stop and reverse rotation.
- Accessories compatible with mooring brands : Ancrest, Fenox, etc.

Technical characteristics

MODEL	TRH MANUAL
<i>Drive</i>	Hydraulic via all carriers 42 mm hexagonal coupling
<i>Ø of augers</i>	100 up to 250 mm
<i>Oil flow minimum / maximum</i>	20 L/min / 50 L/min
<i>Pressure mini. / maxi.</i>	110 bar / 200 bar
<i>Weight (without auger)</i>	28 kg



TRH MANUAL with FENOX mooring

Standard equipment

- Hydraulic valve, 2 hoses of 8 m long, 2 couplers (without auger - 250 mm max. Ø).
- 2-way hydraulic valve for stop and reverse rotation.

MODEL	£	Reference
TRH MANUAL for 2 people with hydraulic motor	1,570	70694A
ACCESSORIES for anchoring - Hexagonal coupling 42 mm		
'ANCREST' mooring Ø 100 to 120 mm	250	70663B
'ANCREST' mooring Ø 150 mm	310	70664B
'FENOX' mooring Ø 120 mm	315	70662B
'LEBEC - AMARAGRI' mooring Ø 120 mm - Hole spacing 40 mm	285	70661B
Universal key for mooring welded on a rod (Maximum thickness 20 mm)	190	706523
AUGERS right pace with interchangeable blades length 1.10 m Hexagonal coupling 42 mm - Ø 100 to 250 mm		
Ø 100 mm - whorl 5 mm thick	410	70676B
Ø 120 mm - whorl 5 mm thick	440	70677B
Ø 150 mm - whorl 5 mm thick	455	70678B
Ø 200 mm - whorl 6 mm thick	535	70679B
Ø 250 mm - whorl 6 mm thick	620	70680B

Mooring
LEBEC



Mooring
AMARAGRI



Mooring
ANCREST



Mooring
FENOX

