

SR RANGE



The SR Range Mulcher fit excavators from **4.0 to 14.0 tons**.

Built with wear-resistant and high-quality materials, SR Range has a compact and robust body which guarantees high productivity combined with resistance to impact and wear, making it suitable for professional uses. The compact design allows the use of this mulcher even in tight spaces. Thanks to the integrated multifunction valve block, the mulcher does not require a drainage pipe up to 10 BAR maximum counter-pressure.




STANDARD TECHNICAL FEATURES

- Compact and robust design
- Frame with double cavity bottom, reinforced up to the point of connection with the front chains for greater impact resistance
- Spherical roller bearings better protected from impurities thanks to a labyrinth of special seals.
- Adjustable attachment position
- Shaft with blades or hammers with fixed supports for a better shredding of the materials.
- Spiral-mounted tools for a better cutting performance
- Toothed V-belt transmission with customizable transmission ratio
- Flow control valve - shock proof valve – anti-cavitation valve – max pressure (it does not require drainage pipe)
- The shaft can be equipped with hammers or Y-shaped blades
- Internal toothed bars that help to chop the material
- Rear blade in rubberized, multi-layered, and tear-proof canvas
- Support roller with through shaft for greater resistance
- Wear-resistant and replaceable slides
- Protection devices in compliance to current European Regulation according to CE norms
- Bolted steel plate to arrange the machine coupler
- High quality painting for greater resistance to impacts and wear

MODEL		SR90	SR110	SR130	SR160
Machine	(ton)	4.0 / 6.0	6.0 / 10.0	10.0 / 12.0	12.0 / 14.0
Oil flow rate	(l/min)	45 / 90	60 / 110	70 / 120	90/140
Max Pressure	(bar)	250	250	250	250
A	(mm)	1070	1270	1470	1770
B	(mm)	815	815	815	815
C	(mm)	550	550	550	550
D (Total Cutting Width)	(mm)	900	1100	1300	1600
Weight	(Kg)	355	395	475	555
Transmission		3 Belts	3 Belts	3 Belts	3 Belts
Blades/Hammers Std	(n°)	10	12	14	16
Ø Cutting (Max)	(cm)	12	12	12	12
Price		4455,00	4710,00	4995,00	5440,00

Mulcher - SR range

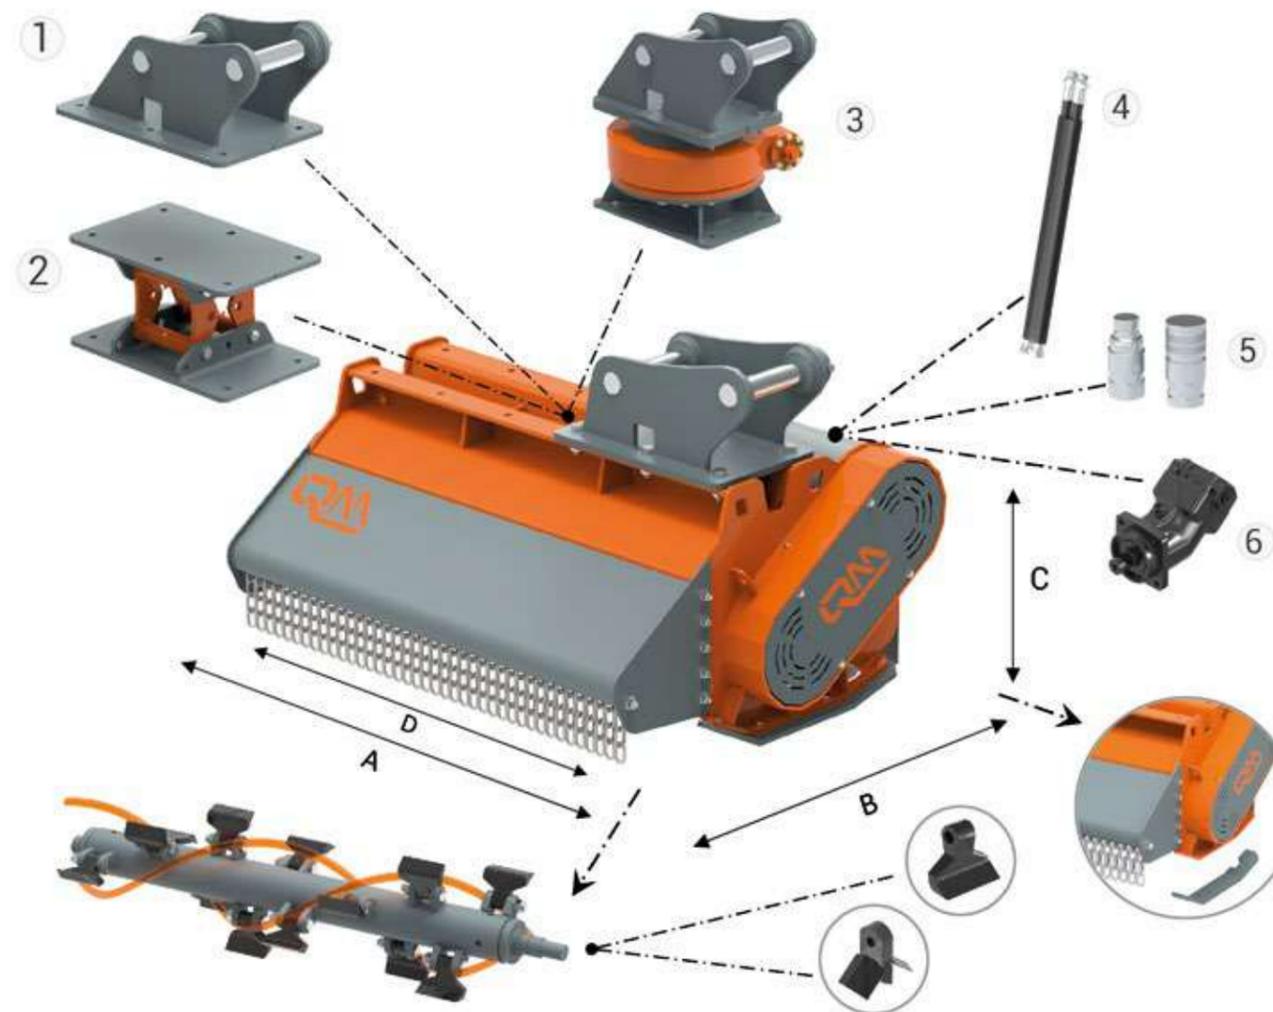

OPTIONAL

1 DIRECT COUPLING (pins)		
Excavators 4.0 / 5.0 ton		270,00
Excavators 5.0 / 6.0 ton		310,00
Excavators 6.0 / 8.0 ton		360,00
Excavators 8.0 / 10.0 ton		410,00
Excavators 10.0 / 12.0 ton		480,00
Excavators 12.0 / 14.0 ton		550,00
2 FLOATING		
AF2 (SR90 - SR110)	KG 48	405,00
AF3 (SR130 - SR160)	KG 88	680,00
3 KIT HYDRAULIC ROTATION		
Hydraulic Rotation		2780,00
4 HYDRAULIC LINE KIT *		
Pipe 1/2" L=2000		125,00
Pipe 3/4" L=2000		155,00
5 FACCIA PIANA QUICK COUPLINGS **		
Connection size 1/2"		85,00
Connection size 3/4"		190,00
6 AXIAL PISTON ENGINE		
Axial Piston Engine		1720,00

* On demand it is possible to provide different lengths out of standard ones

** On demand it is possible to provide other quick couplings than those indicated above

All data are intended WITHOUT ATTACHMENT TO THE MACHINE

MULCHER

PRICE LIST

MULCHER

PRICE LIST