

THE «5IN1» ROTOR

All our machines* are equipped with 1 single rotor for rapid changeover between : KNIFE, HAMMER OR MIXED FUNCTIONING



*except VEGETOR 80 range

SERIAL EQUIPMENT



1 Use with **2 KNIVES** alone or with locked hammers

Ideal for fuelwood production, valuable in firewood, mulch...



2 USE with **HAMMERS - 2 ROWS OF HAMMERS**

Ideal for dirty wood applications, volume reducing for compost, mulch, RCW (Ramial Chipped Wood)...




3 MIXED use **KNIVES + HAMMERS 2 rows of hammers + 2 knives**

Ideal for clean wood applications, volume reducing for compost, mulching, RCW (Ramial Chipped Wood)...



OPTIONS



4 USE with **1 KNIFE (VEGETOR 200 only)**

Ideal for fuelwood production, valuable in firewood, mulch...



5 USE with **HAMMERS - 4 ROWS OF HAMMERS**

(option kit 2 rangées de fléaux)

Ideal when working with dirty woods for reducing volumes, developing compost, mulch...

How to appreciate the WOODEN CHIPS ?



FUEL WOOD



SOLID WOOD MULCHING



COMPOST



THE RCW

FEEDING ROLLER



1 Branch put on the hopper's side



2 The branch is redirected in the center thanks to the helical rollers



3 The branch gets in the rotor's axis and its forks reposition themselves for a better grinding



Thanks to this design, the rollers enable a food refocusing towards the rotor, and the forked wood are cut more easily; the machine's capacity and productivity are significantly increased



VEGETOR 200 T



VEGETOR 200 T



Rabaud advantages


- Maximum wood diameter 200 mm.
- Can be mounted on tractors from 75 HP up to 120 HP (150 HP with cardan shaft with slipping clutch).
- Rotor «5 in 1» (2 knives + 2 rows of 11 hammers).
- Very wide feeding roller to centre the branches and ease the cut of forked woods - RABAUD Exclusivity.
- Adjustable speed of the feeding rollers for increasing or reducing the size of shavings.
- NOSTRESS regulation with 3 positions: ECO / MEDIUM / MAX.
- Feeding conveyor can be added in option.
- Quick access to the mechanical and hydraulic parts of the machine for maintenance (pump, rollers...).
- Safe machine: STOP safety bar and forward and reverse buttons.
- Foldable hopper and blower for a compact machine during transport.
- Tilting blower with a cap adjustable by chain.

Technical characteristics

MODEL	VEGETOR 200 T
<i>Maximum wood diameter</i>	200 mm
<i>Opening (W x H)</i>	280 x 210 mm
<i>Feeding roller</i>	1 horizontal toothed convergent
<i>Roller width</i>	600 mm
<i>Hydraulic adjustment of the rotor speed</i>	Hydraulic via external control knob
<i>Rotor type</i>	The «5in1» rotor See page 52
<i>Rotation speed of the rotor</i>	1600 up to 2200 rpm in accordance with the NOSTRESS setting
<i>Size of hopper (L x W x H)</i>	1,72 x 1,03 x 0,81 m
<i>NOSTRESS device</i>	Yes with 3 presettings
<i>Foldable hopper</i>	Yes
<i>Height of hopper from the ground</i>	700 mm
<i>Blower</i>	With adjustable head rotation 360° mounted on ball bearings
<i>Calibration grid</i>	Option
<i>Tool chest</i>	Yes + in option a tool chest can be added
<i>Transport dimensions (L x W x H)</i>	2,40 x 1,60 x 2,14 m
<i>Work dimensions (L x W x H)</i>	2,77 x 1,86 x 3,12 m
<i>Weight</i>	890 to 950 kg
<i>Coupling</i>	On tractor from 75 to 135 HP (150 HP with slipping clutch) 3-point linkage category 1 & 2
<i>Drive</i>	PTO 1000 rpm With hydraulic pump 20 L/min.
<i>Production per hour (estimated)</i>	5000 kg (15 MAP)

Standard equipment

- Shaft with safety bolt (slipping clutch in option).
- Rotor «5 in 1» (2 knives + 2 rows of 11 hammers).
- Forwarding adjustment speed for feeding roller.
- Foldable, swiveling blower with chain-adjustable cap.
- Hopper with transparent anti-spatter protection with safety control bar with 2 STOP positions + emergency stop.

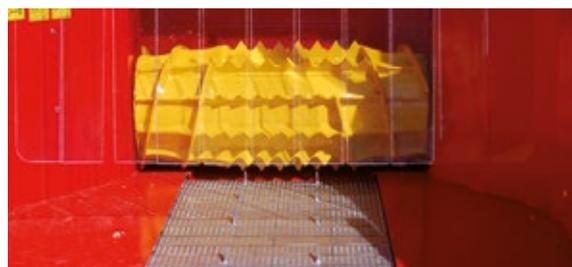


Feeding roller and feeding conveyor option



	£	Reference
MODELS		
VEGETOR 200 T - Tractor 135 hp max Hopper without feeding conveyor, with scraper - PTO 1000 rpm + hydraulic power pack 20 L/min	18,655	71842D
VEGETOR 200 T with feeding conveyor - Tractor 135 hp max Hopper with feeding conveyor 400 mm wide - PTO 1000 rpm + hydraulic power pack 20 L/min	21,175	71843D
OPTIONS		
for PTO 1000 rpm – for tractors up to 150 hp	470	006B32
Calibration grid	410	71841A
Support for chainsaw / hedge trimmer (max. 2)	170	71832C
Support for handled tools : shovel, rake... (max. 2)	65	71836C
Tool chest	225	71851C
Added value organic oil - Panolin® - for 1 L (to define upon order) / capacity 12 liters	20	22B021
2 rows of 11 hammers to work in 4 hammers rows mode	765	71862B
Balancing support to work in 1 knife mode	375	718639
SPARE PARTS		
2 blades + bolting	400	71823B
Hammer - unit price	25	718076

☑ OPTIONS

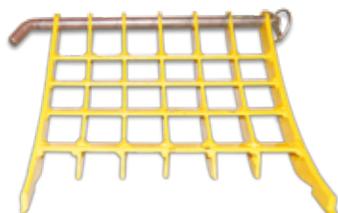

Calibration grid



Tool chest



Support for chainsaw



Support for handled tools

