



XYLOR 1800/95 T



XYLOR 2200/125 T with fixed branches reel

- For tractors from 80 to 125 HP.
- Helical rotor with mobile hammers and 2 counter hammers' lines.
- Adaptable on front or rear 3-point linkage thanks to the multiplier casing with dual output and double free wheel.
- Hydraulic rear trap with cylinder to release the waste.
- Articulations without grease points (selflubricating rings).
- Skids with special geometry in order to work on any type of grounds.
- Protected rotor and hub grease points.
- Fixed branches reel (option).




Technical characteristics

| MODELS | XYLOR 1800/95 T | XYLOR 2000/110 T | XYLOR 2200/125 T |
|--|----------------------------|----------------------|----------------------|
| <i>Tractor power</i> | 80 to 95 HP | 95 to 110 HP | 110 to 125 HP |
| <i>Coupling</i> | 3-point linkage cat. N° 2 | | |
| <i>Rotor type</i> | 360° mobile hammers | | |
| <i>Number of hammers</i> | 32 | 36 | 40 |
| <i>Number of counter-hammer lines</i> | 2 | | |
| <i>Crushing width</i> | 1800 mm | 2000 mm | 2200 mm |
| <i>Shredding Ø</i> | 150 mm | | |
| <i>Helical rotor</i> | Yes | | |
| <i>Rotor Ø (with tools)</i> | 525 mm | | |
| <i>Drive</i> | 5 belts | | |
| <i>Rear trap</i> | Hydraulic through cylinder | | |
| <i>Dimensions with branches reel (L x W x H)</i> | 1,10 x 2,10 x 1,12 m | 1,10 x 2,30 x 1,12 m | 1,10 x 2,50 x 1,12 m |
| <i>Weight</i> | 1140 kg | 1220 kg | 1300 kg |

Standard equipment

- Lateral transmission through toothed belts.
- Helical rotor with mobile hammers
- 2 screwed crest counter hammers lines
- Double row of front chains and anti-spatter rubber band.
- Multiplicator 540 rpm or 1000 rpm gearbox.
- Special belt tensioner with third pulley

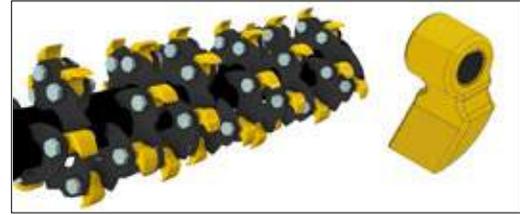

| | | | | £ | Reference |
|---|----------------|---|---|---------------|-----------|
| MODELS | | | | | |
| XYLOR 1800/95 T For tractor with 80 up to 95 HP power - 3-point linkage N° 2 | Drive 540 rpm | | | 11,215 | 79166A |
| | Drive 1000 rpm | | | 11,440 | 79180A |
| XYLOR 2000/110 T For tractor with 95 up to 110 HP power - 3-point linkage N° 2 | Drive 540 rpm | | | 11,810 | 79167A |
| | Drive 1000 rpm | | | 12,030 | 79181A |
| XYLOR 2200/125 T For tractor with 110 up to 125 HP power - 3-point linkage N° 2 | Drive 540 rpm | | | 12,500 | 79168A |
| | Drive 1000 rpm | | | 12,730 | 79182A |
| OPTIONS | | | | | |
| Fixed branches reel | | ● | | | |
| | | | ● | | |
| | | | | ● | |
| Kit hydraulic top link Cat. 2 - 10 Tons / 6 Tons - 200 bar | ● | ● | ● | 445 | 72103A |
| SPARE PARTS | | | | | |
| Kit hammer + screw + nut – unit price | | | | 35 | 79137A |

The ● means compatibility of options with different models.

