



XYLOR 2200/250 T



XYLOR 2200/250 T


- For tractors from 80 to 300 HP.
- Helical rotor with fixed carbide points' hammers and highresistance oscillating bearings.
- Rotor with heavy-duty oscillating bearings.
- Hermetic closure on the rotor.
- Housing with robust free wheel.
- Hydraulic branches reel with bolted points (option).
- Adjustable anti-wear skids.
- Hydrodynamic clutch in option (except on XYLOR 2000/120 T) to facilitate the startup with rotor smooth acceleration.
- Pulleys with dismountable conical shaft.
- Front and rear protections with chains.
- High-resistance frame in hard steel.



Rabaud
advantages

Technical characteristics


MODELS	XYLOR 2000/120 T	XYLOR 2200/175 T	XYLOR 2200/250 T	XYLOR 2200/300 T
Tractor power	80 to 120 HP	120 to 175 HP	175 to 250 HP	250 to 300 HP
Coupling	3-point linkage cat. N° 2	3-point linkage cat. N° 2 & 3	3-point linkage cat. N° 3	
Rotor type	Fixed hammers			
Number of hammers	39	45	76	
Counter hammers' lines	2		3	
Crushing width	2000 mm	2200 mm		
Average grinding Ø	200 mm	300 mm	360 mm	400 mm
Helical rotor	Yes			
Rotor Ø (with tools)	420 mm	520 mm	620 mm	750 mm
Drive	5 belts	4 + 4 belts	5 + 5 belts	6 + 6 belts
Rear trap	Hydraulic through 1 cylinder	Hydraulic through 2 cylinders		
Dimensions (L x W x H)	1,00 x 2,45 x 0,95 m	1,18 x 2,76 x 1,48 m	1,33 x 2,65 x 1,62 m	1,35 x 2,69 x 1,84 m
Weight	1255 kg	2455 kg	2975 kg	4005 kg

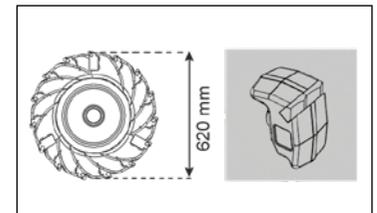

Ø Rotor :
XYLOR 2000/120T - 420 mm
XYLOR 2200/175T - 520 mm
XYLOR 2200/250 T - 620 mm
XYLOR 2200/300 T - 750 mm

Standard equipment

- 2 or 3 bolted counter hammers rows according to the model
- Housing with robust free wheel
- Adjustable anti-wear skids.
- Front and rear protections with chains.
- Hydraulic rear door fitted with 1 or 2 cylinders according to model
- 1000 rpm PTO with shaft fitted with a safety bolt
*Attention in case of tractors shaft with 6 flutes (splines) 1"3/8 Z6
For 20/21 spline transmission, please advise us*

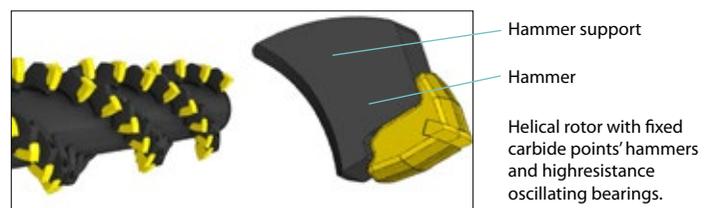



MODELS		£	Reference				
XYLOR 2000/120T For tractor with 80 up to 120 HP power - 1000 rpm		16,820	79121A				
XYLOR 2200/175T For tractor with 120 up to 175 HP power - 1000 rpm With self-alignment of the gearbox case and kit hydraulic top link N°3		29,710	79170A				
XYLOR 2200/175T For tractor with 175 up to 250 HP power - 1000 rpm With self-alignment of the gearbox case and kit hydraulic top link N°3		37,050	79171A				
XYLOR 2200/300 T For tractor with 250 up to 300 HP power - 1000 rpm With self-alignment of the gearbox case and kit hydraulic top link N°3		48,990	79172A				
OPTIONS		XYLOR 2000/120 T	XYLOR 2200/175 T	XYLOR 2200/250 T	XYLOR 2200/300 T		
Kit hydrodynamic clutch			●	●		9,050	79113A
Kit hydraulic top link Cat. 2 - 10 Tons / 6 Tons - 200 bar		●			●	11,445	79125A
Fixed branches reel	Fixed (without claws)	●				875	79174A
			●	●	●	1,055	79175A
	Hydraulic	●				1,460	79126A
				●	●	2,390	79173A
Claws for reel with removable points				●	Serial	2,290	79136A
Rows of bolted counter hammers in hardox steel	2		●			530	79120A
	3			●	Serial	645	79115A
SPARE PARTS							
Kit mobile hammer + screw + nut – unit price						145	79145A

The ● means compatibility of options with different models.



Bolted and interchangeable counter hammers



Kit hydrodynamic clutch



Adjustable anti-wear skids



Hydraulic rear trap with cylinder(s)

