

NEXOCLAW



NexoClaw are front-mounted grapples for mini loaders and skid steer loaders, compact, easy to handle, and built to last. With their strong gripping force and the ability to rotate on their own axis, they adapt easily to any situation, ensuring precise and efficient handling of logs, branches, and bulky materials. Available in two versions: with traditional claws for a secure, stable grip, or with five-tooth claws for deeper penetration into irregular materials, they deliver outstanding versatility and control in all applications. Their optimized design and rigid mounting system provide maximum stability during transport, making them the ideal tool for fast and efficient operations.





STANDARD AND OPTIONAL TECHNICAL FEATURES

- Optimized shape 100% for easy and precise collection, with a design that prevents the accumulation of unwanted material and allows the timber to flow smoothly within the claws without obstruction.
- Hydraulic cylinder with large bore and integrated locking valve, providing a powerful and secure grip, preventing accidental openings and ensuring greater operational safety.
- High-quality steel structure, resistant to bending and wear, with reinforced IMEX700 claws, designed to withstand the most intense stresses.
- Honeycomb bronze bushings with lubrication points for smooth operation and reduced wear over time.
- High-quality paint, with greater resistance to impacts and wear, ensuring a longer life of the claw.
- Hydraulic hoses with protective sheath and anti-wear spiral, designed to withstand stress and demanding working environments.
- Interchangeable machine attachment for versatile compatibility with various mini loaders and mini excavators.
- 300° rotation with an adjustable locking system, allowing the claw to adapt to any operational need. The locking system, which can be unlocked via a convenient lever, ensures maximum versatility and precision in every operation.
- Rotating handles with threaded anchor links, ideal for securing ropes or cables and hauling logs from hard-to-reach areas. The rotating system adapts to the angle of the rope, optimizing traction safely.

NexoClaw



NEXOCLAW		F1	F2	S1	S2
A	mm	900	1100	900	1100
B	mm	480	668	460	645
C	mm	600	770	636	816
D	mm	345	568	320	528
E	mm	696	800	662	760
F	mm	650	800	650	800
G	mm	70	75	60	60
WEIGHT	Kg	140	210	120	170
OIL FLOW RATE	L/min	15/60	20/80	15/60	20/80
MAX PRESSURE	bar	250	250	250	250
	PRICE	£3,700.00	£4,595.00	£3,150.00	£3,995.00

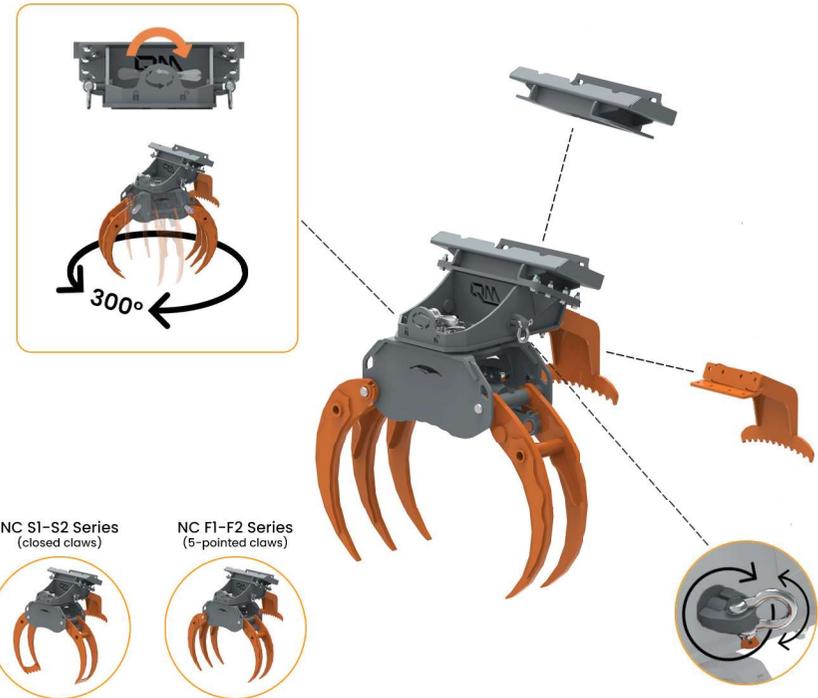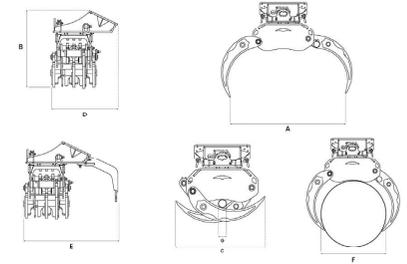

NC S1-S2 Series
(closed claws)



NC F1-F2 Series
(5-pointed claws)



MACHINE COUPLING

Fully customisable to suit any adapter plate

CAPSTAN & BALL HITCH ** OPTIONAL

Capstan £220.00 *Only Available on F2 & S2 Models

TOOTHED BRACE 16Kg **OPTIONAL S1/F1 MODELS

Ball Hitch £80.00

Optional on S1 & F1 Models £175.00 Extra

It distributes the load weight evenly, increasing stability and safety

** On demand it is possible to provide different Quick coupling that those indicated above

All data is intended WITHOUT ATTACHMENT TO THE MACHINE, all pricing is plus VAT.