

**LIFTING CAPACITY**

1300 Kg [B] (with counterweights)

**BOOM HEIGHT**


2980 mm

**ENGINE POWER**

26 HP


**HYDRAULIC SYSTEM**

46 l/min

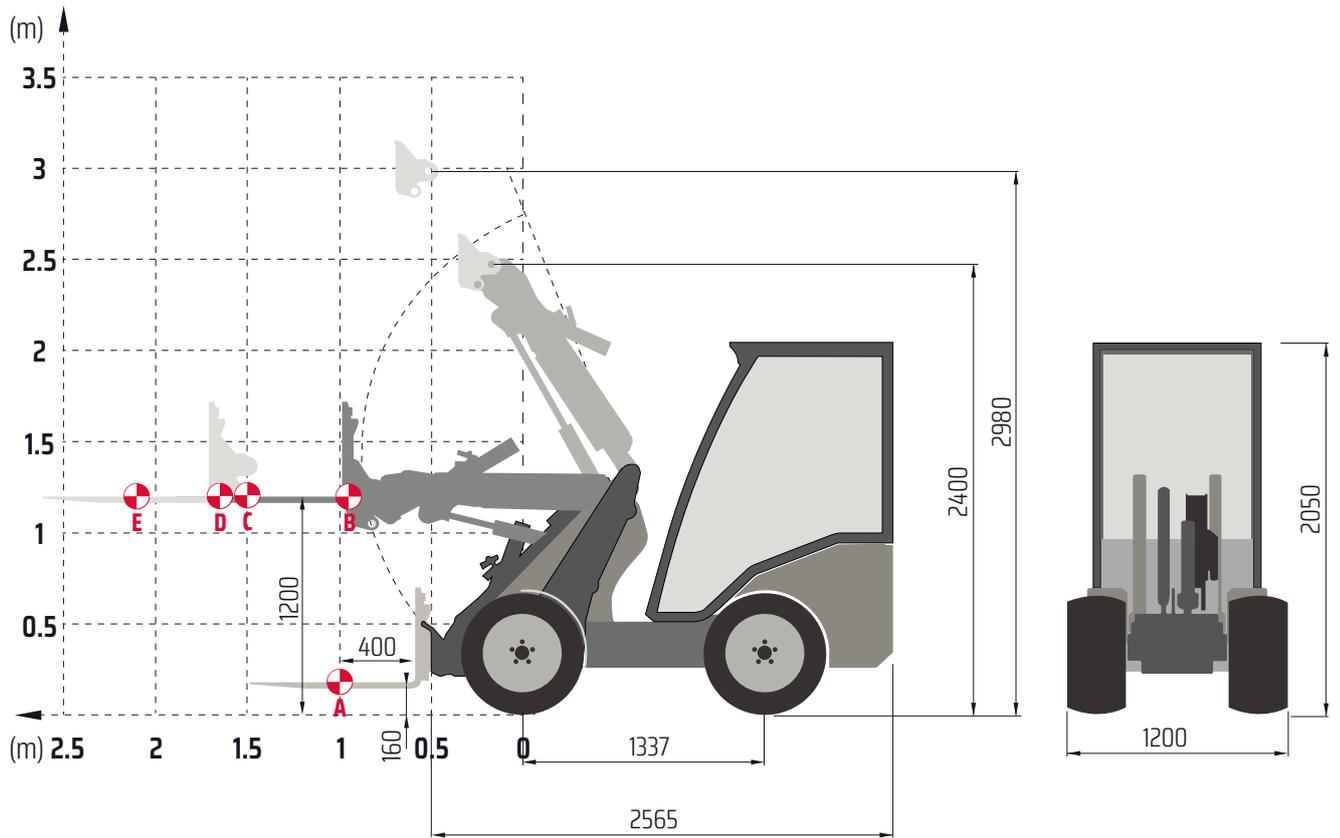


TIPPING LOAD

- A Transport position
- B Boom horizontal (without pallet fork)
- C Boom horizontal
- D Boom horizontal + extension
- E Boom horizontal + extension

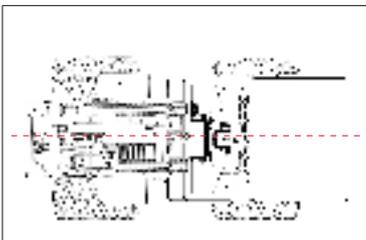

	BALLAST (200 kg)	NO BALLAST
A	950 Kg	800 Kg
B	1300 Kg	1100 Kg
C	860 Kg	550 Kg
D	800 Kg	600 Kg
E	500 Kg	300 Kg

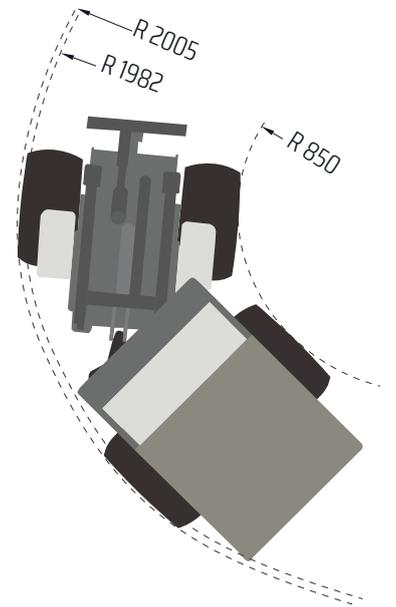

STANDARD SET-UP

Engine	Kubota D 1305
Power Hp / Kw	26 / 18,6
Hydrostatic transmission - 4WD	PoClain Dual Speed and anti-skid standard
Electric differential lock	Standard
Water cooling	Standard
Selflevelling	Standard
Hydraulic system l/min	46
Joystick	11- function joystick
12 V power outlet + front auxiliary electric outlet (165 W)	Standard
Working LED lights (2 front + 1 rear)	Standard
Comfort seat	Standard
"UNIVERSAL" coupling plate	Standard
Metal hoods side opening	Standard
ROPS+FOPS protection	Standard
Telescopic boom	Standard
Silent block	Standard
Tractor wheels	26x12.00-12
Weight Kg	1280

CODE WITH STANDARD SET-UP

PRICE

P 8 4 0 0 0 0 1

30.755,00

MORE DATA

Tipping load in transport position with counterweights (Kg)	1100
Max pulling force (Kg)	920
Breakout force with boom down (Kg)	1200
Average sound power level (dB/LwA)	99
Guaranteed sound power level (dB/LwA)	101
Speed (km/h)	20
Engine oil tank capacity (L)	5,7
Hydraulic oil tank capacity (L)	29

WHEELS



SKID
23x8.50-12
26x12.00-12



ALL TRAC
8PR
300/60X12



TRACTOR
23x8.50-12
23x10.50-12
26x12.00-12
7.00-12



TURF
23x8.50-12
23x10.50-12
24x13.00-12
26x12.00-12
26.5x14.00-12

☐ OPTIONS											PRICE
4	5	1	2	0	2	1	6	M	1	Electric floating system	263,00
4	5	1	2	0	2	1	7			Driving lights	930,00
4	5	1	2	0	2	3	9			Difference for high power Working LED lights (2 front + 1 rear)	261,00
4	5	1	2	0	2	4	1			Rear-view mirrors	131,00
4	5	1	2	0	3	9	0			Difference from standard to turf wheels 26.5x14.00-12	591,00
4	5	1	2	0	2	6	1			Difference from standard to turf wheels 26x12.00-12	201,00
4	5	1	2	0	2	6	2			Difference from standard to turf wheels 24x13.00-12	583,00
4	5	1	2	0	2	6	3			Difference from standard to skid wheels 26x12.00-12	720,00
4	5	1	2	0	2	6	7			Difference from standard to tractor wheels 7.00-12	330,00
4	5	1	2	0	2	7	3			Difference from standard to trac master wheels 300/60X12	148,00
4	5	1	2	0	2	2	5			Winter protection (front wind+screenwiper)	627,00
4	5	1	2	0	3	3	4			Right armrest of the seat	62,00
4	5	1	2	0	3	5	3			Reverse alarm	169,00
4	5	1	2	0	2	1	8			Cabin with heating system	4.031,00
4	5	1	2	0	0	4	3			3 sides glass cabin	2.086,00
4	5	1	2	0	0	4	5			Heating system	920,00
4	5	1	2	0	2	3	1			Pre-heating of engine's water	269,00
4	5	2	3	0	3	8	6			Radiator protection grille	600,00
4	5	1	2	0	3	4	0			Side safety protection	434,00
O	N	D	E	M	A	N	D			Pair snowchains + wheel spacers 26x12.00-12	On Demand
4	5	1	2	0	2	1	0			Quick coupling system "MULTIFASTER" ® Part fixed on the machine	504,00
4	5	1	2	0	2	1	1			Quick coupling system "MULTIFASTER" ® Part for the attachments	256,00
4	5	1	2	0	0	1	7			Dual hydraulic function for boom lift + hydraulic outlets	178,00