

RF RANGE



The RF mulcher is applicable to Skid Loaders and Wheel Loaders with universal front attachment SAE J2513 and designed for mulching large areas. A compact and resistant shell, combined with the new translating/levelling system (patent pending QM), make this machine very versatile and easy to use in multiple situations. It is equipped with a valve group "shockproof", "anti-cavitation" and "pressure control and limitation". Y knives with intermediate or hammers, are fitted as standard according to customer preferences.




STANDARD FEATURES

- Compact and robust design that improves visibility from the cockpit
- Body with double cavity bottom
- Adjustable front hood opening
- Reinforced front bonnet with double cavity bottom for greater impact resistance
- Spherical roller bearings which, thanks to a labyrinth of special seals, are better protected from impurities
- Bilateral mechanical translation
- Shaft with knives or hammers with fixed supports for better shredding of the material
- Spiral shape of the tools for better cutting capacity
- Toothed V-belt transmission with customizable gear ratio
- Flow regulating valve block - anti-shock - anti-cavitation - max pressure
- Possibility to equip the rotor with hammers or Y-knives
- Toothed internal bars that helps to finely chop the material
- Rear strap in multi-layer, tear-proof canvas rubber
- Support roller with through shaft for greater thrust resistance
- Interchangeable support slides
- Hydraulic pipes L=2000
- CE compliant accident protections
- Self-levelling system to adapt to the terrain
- High quality painting for greater resistance to impacts and wear

MODEL		RF160	RF185	RF210
Oil flow rate	lt min/max	50/110	70/120	90/140
Max Pressure	bar	250	250	250
A	mm	1790	2040	2290
B	mm	1160	1160	1160
C	mm	610	610	610
D (Total Cutting Widht)	mm	1600	1850	2100
Weight	kg	690	750	815
Transmission		3 Belts	3 Belts	3 Belts
Tools	n°	16	18	20
∅ Cutting (Max)	cm	10	10	10
Price		9495,00	10270,00	11265,00

Mulcher - RF range

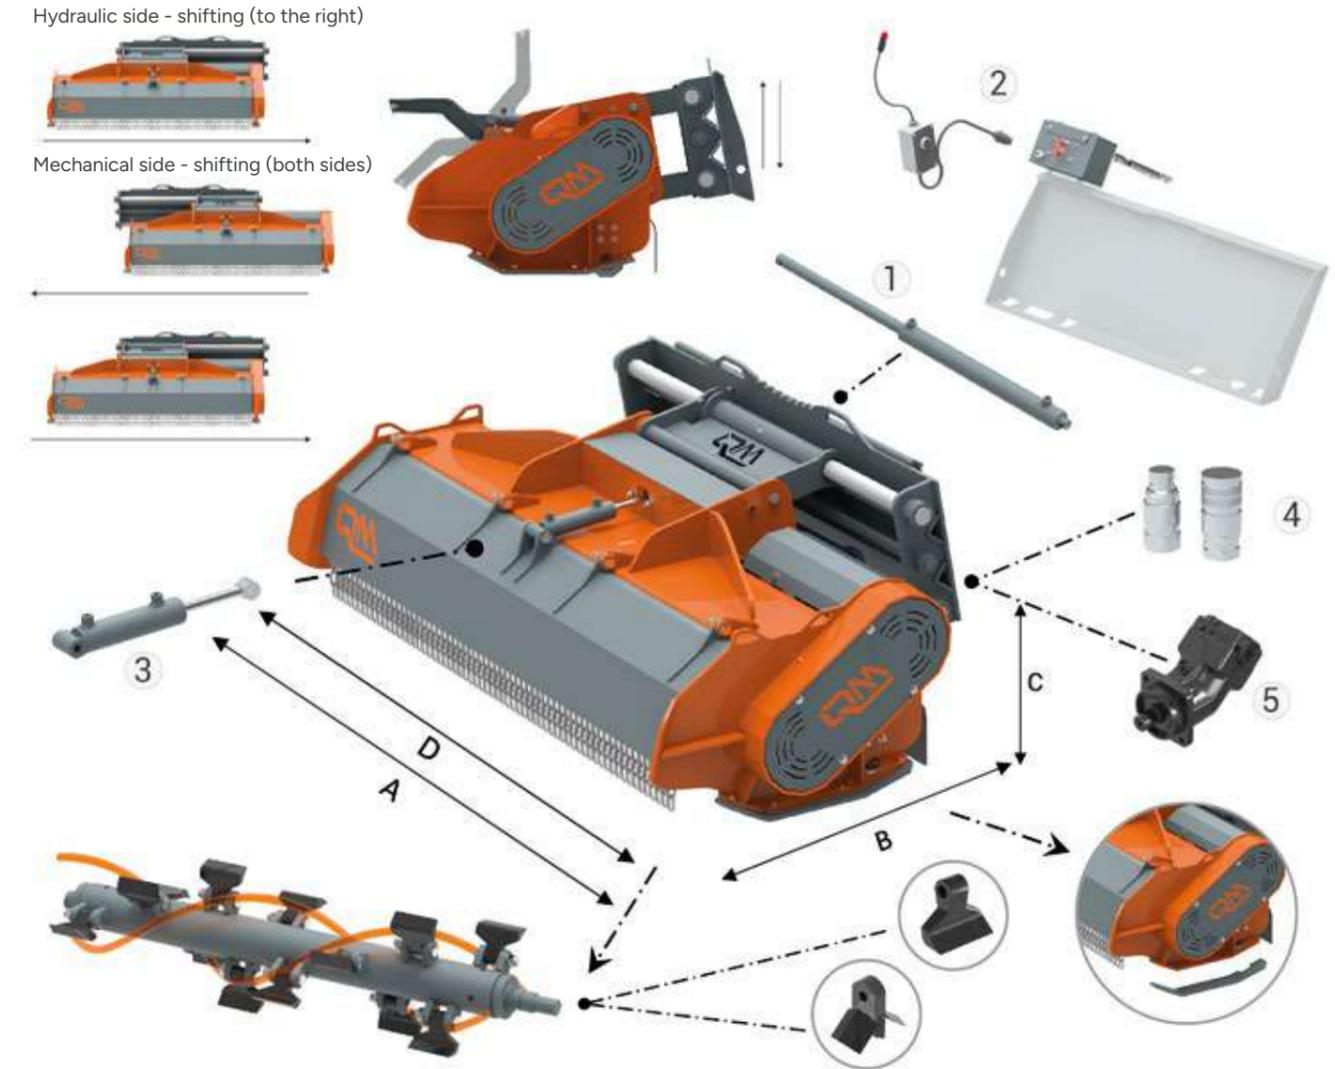

OPTIONAL

- | | | |
|---|--|---------|
| 1 | HYDRAULIC TRANSLATION KIT
Allows sliding of the mulcher 400mm to the right by hydraulic piston with double hydraulic line (pipes included) | 520,00 |
| 2 | ELECTRO-HYDRAULIC TRANSLATION AND HOOD OPENING KIT
Allows sliding of the mulcher 400mm to the right and the opening of frontal hood piston engine with external drainage | 1485,00 |
| 3 | HYDRAULIC HOOD OPENING
Allows the frontal hood opening by hydraulic piston with double hydraulic line | 595,00 |

- | | | |
|---|--|---------|
| 4 | FACCIA PIANA QUICK COUPLINGS ** | |
| | Connection size 1/2" | 85,00 |
| | Connection size 3/4" | 190,00 |
| | Connection size 1" | 295,00 |
| 5 | PISTON ENGINE | |
| | Piston engine with external drainage | 1720,00 |

*On demand it is possible to provide pipes of different lengths out of standard ones
 **On demand it is possible to provide 8-14 pole electric connections for electro-command
 *** On demand it is possible to provide other quick couplings than those indicated above
 All data are intended WITHOUT ATTACHMENT TO THE MACHINE



MULCHER

PRICE LIST

MULCHER

PRICE LIST