

# RS RANGE



The RS mulcher is applicable to Skid Loaders and Wheel Loaders with universal front attachment SAE J2513 and designed for mulching large areas. A compact and resistant shell, combined with the new translating/levelling system (patent pending QM), make this machine very versatile and easy to use in multiple situations. It is equipped with a valve group "shockproof", "anti-cavitation" and "pressure control and limitation". Y knives with intermediate or hammers, are fitted as standard according to customer preferences.




## STANDARD FEATURES

- Compact and robust design that improves visibility from the cockpit
- Body with double cavity bottom, reinforced up to the connection point with the front chains for greater impact resistance
- Spherical roller bearings which, thanks to a labyrinth of special seals, are better protected from impurities
- Bilateral mechanical translation
- Shaft with knives or mallets with fixed supports for better shredding of the material
- Spiral shape of the tools for better cutting capacity
- Toothed V-belt transmission with customizable gear ratio
- Flow regulating valve block - anti-shock - anti-cavitation - max pressure
- Possibility to equip the rotor with hammers or Y-knives
- Toothed internal bars that helps to finely chop the material
- Rear strap in multi-layer, tear-proof canvas rubber
- Support roller with through shaft for greater thrust resistance
- Interchangeable support slides
- Hydraulic pipes L=2000
- CE compliant accident protections
- Self-levelling system to adapt to the terrain
- High quality painting for greater resistance to impacts and wear

MODEL		RS160	RS185	RS210
Oil flow rate	lt min/max	50/110	70/120	90/140
Max Pressure	bar	250	250	250
A	mm	1790	2040	2290
B	mm	1160	1160	1160
C	mm	610	610	610
D (Total Cutting Width)	mm	1600	1850	2100
Weight	kg	705	765	830
Transmission		3 Belts	3 Belts	3 Belts
Tools	n°	16	18	20
Ø Cutting (Max)	cm	10	10	10
Price		7725,00	8340,00	9100,00

## Mulcher - RS range

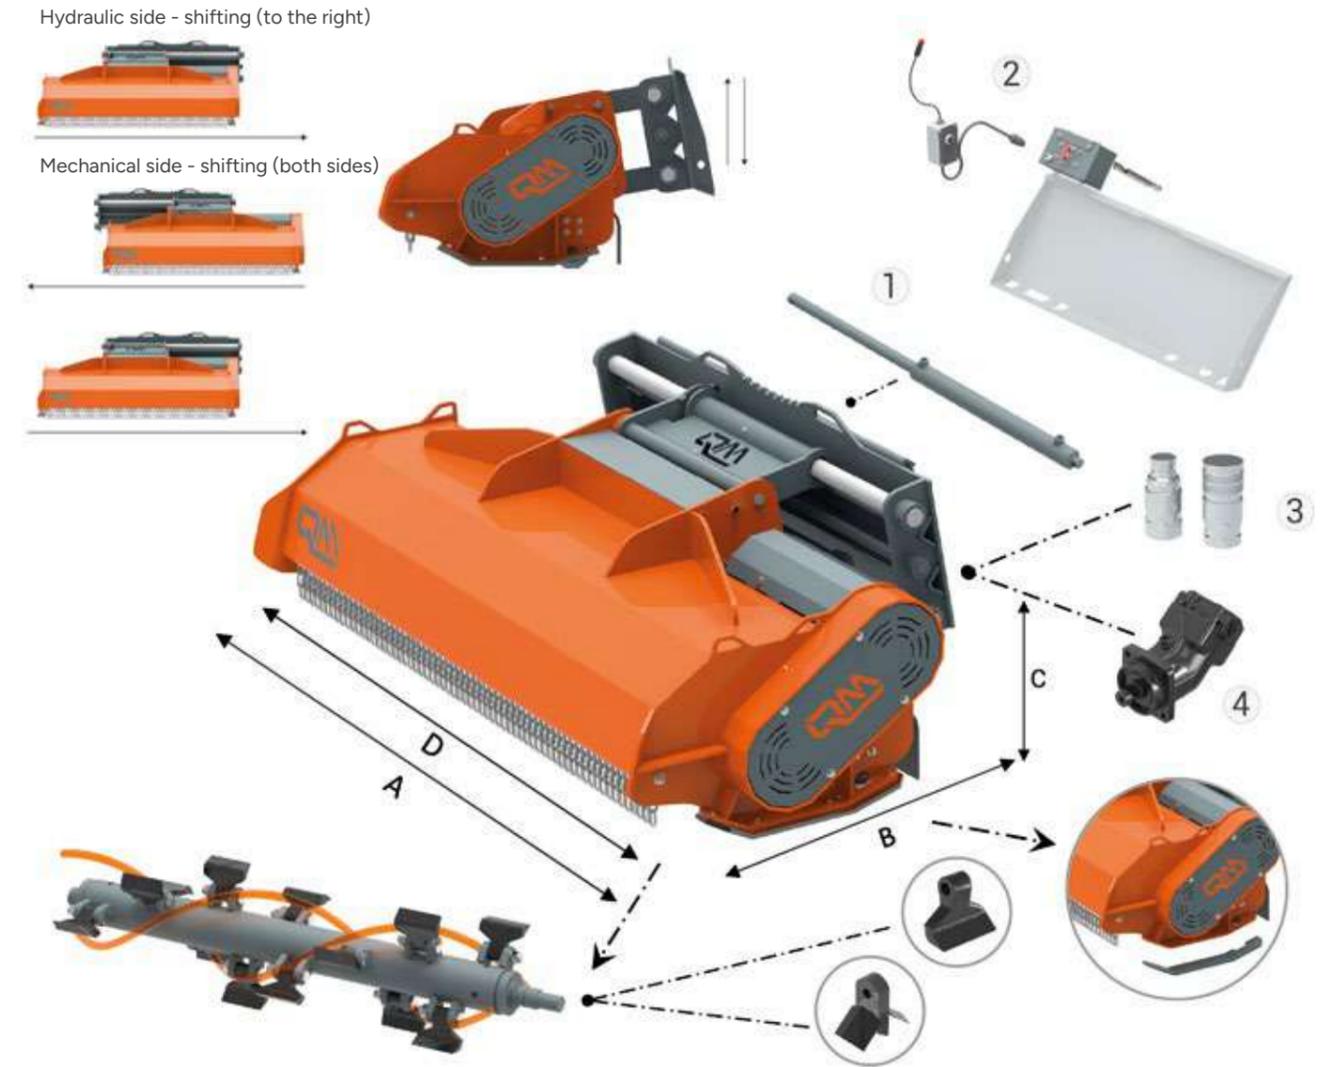

## OPTIONAL

- 1 HYDRAULIC TRANSLATION KIT**  
 Allows sliding of the mulcher 400mm to the right by hydraulic piston with double hydraulic line (pipes included) 520,00
- 2 ELECTRO-HYDRAULIC TRANSLATION KIT**  
 Allows sliding of the mulcher 400mm to the right by electro command with single hydraulic line (piston included) 925,00

- 3 FACCIA PIANA QUICK COUPLINGS \*\***  
 Connection size 1/2" 85,00  
 Connection size 3/4" 190,00  
 Connection size 1" 295,00
- 4 PISTON ENGINE**  
 Piston engine with external drainage 1720,00

\*On demand it is possible to provide pipes of different lengths out of standard ones  
 \*\*On demand it is possible to provide 8-14 pole electric connections for electro-command  
 \*\*\* On demand it is possible to provide other quick couplings than those indicated above  
 All data are intended WITHOUT ATTACHMENT TO THE MACHINE

